


Magnetic Float Switches For Liquid Level Alarm and Pump Control

- *Ideal for industrial applications such as pump control and high or low alarm duty on tanks and pressure vessels*
- *Simple, rugged, and reliable. Low cost of ownership*
- *Direct (side or top) or chamber mounting*
- *Variety of switch mechanisms for electrical or pneumatic switching*
- *Operates in most liquids*
- *ATEX and marine approvals*

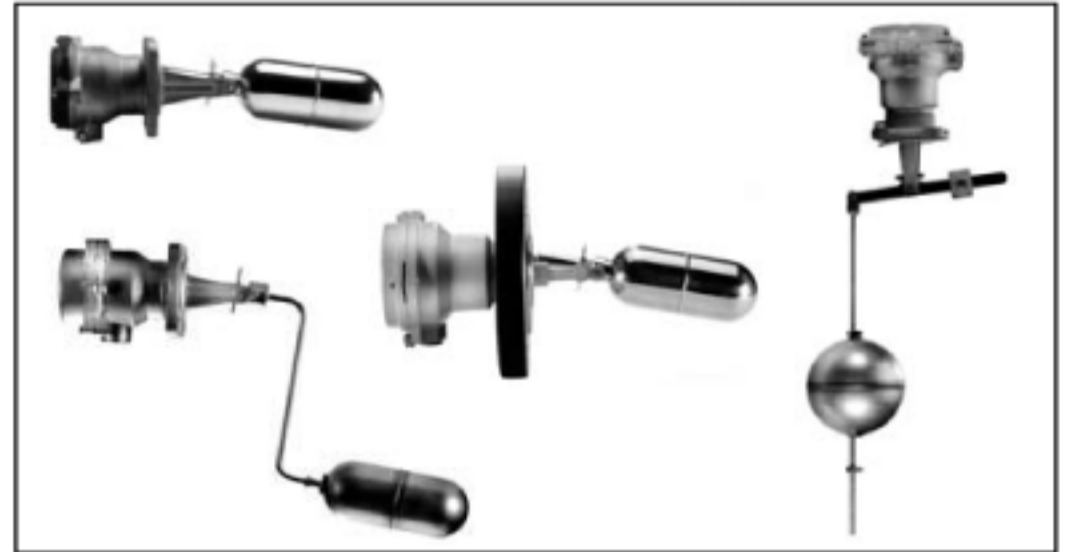

Contents

Ordering Information	page 3
Float Switches for General Purpose Applications (Aluminum Bronze Wetside)	page 3
Float Switches for General Purpose Applications (Stainless Steel Wetside)	page 4
Float Switches for Hazardous Area Applications	page 6
Float Switches for Marine Applications	page 8
Spare Parts and Accessories	page 10
Specifications	page 12
Float Switch Specifications	page 12
Switch Mechanism Specifications	page 16
Dimensional Drawings	page 17
Mobrey 'A' and 'G' Flanges	page 17
General Purpose Magnetic Float Switches (Aluminum Bronze Wetside)	page 17
General Purpose Magnetic Float Switches (Stainless Steel Wetside)	page 18
Hazardous Area Magnetic Float Switches	page 19
Marine Magnetic Float Switches	page 20
Nozzle and Stud Lengths	page 21
Horizontal F68 Pump Control And Alarm Float	page 21
Vertical F21 Pump Control And Alarm Float	page 22
Cranked Arm Floats F104	page 23

INTENTIONAL BLANK PAGE

Float Switches for General Purpose Applications (Aluminum Bronze Wetside)

- Ideal for industrial applications such as pump control, and high or low alarm duty
- Weatherproof To IEC60529 (IP66)
- Ordinary location certification for CSA available – contact factory
- Marine approvals: Lloyds Register of Shipping (LRS), Germanischer Lloyd, DNV, ABS, BV, RINA, and RMRS



Additional Information

Specification: page 12


Dimensions: page 17

TABLE 1. Ordering Information For General Purpose Magnetic Float Switches (Al Br Wetside)

★The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.
The Expanded offering is subject to additional delivery lead time.

Model	Product Description				
S	Switch				
Flange (Head) ⁽¹⁾		Rating	Flange Standard		Max. T_{Process} ⁽²⁾
Standard					Standard
01	Mobrey A ⁽³⁾	261 psi (18 bar)	Mobrey		410 °F (210 °C) ★
Switch Mechanism ⁽⁴⁾					
Standard					Standard
DB ⁽⁵⁾	Electrical: 2 independent Single Pole Single Throw (SPST) contact sets				★
PB ⁽⁶⁾	As Type DB but with <i>gold plated contacts</i>				★
Expanded					
D6B ⁽⁵⁾	Electrical: 2 independent circuits of double pole changeover contact sets				
P6B ⁽⁶⁾	As Type D6B but with <i>gold plated contacts</i>				
APA	Pneumatic air pilot valve on/off for switching air circuits				
AMA	Pneumatic air pilot valve for continuous modulating of air controlled circuits				
Float ⁽⁷⁾		Max. T_{Process} ⁽²⁾	Max. P @ T_{Room}	Max. P @ T_{Max}	
Standard					Standard
F84 ⁽⁸⁾	General purpose e.g. high/low alarm, 316 SST	752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	★
F68/+ ⁽⁹⁾	Horizontal pump control or alarm, 316 SST	752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	★
F21/+ ⁽⁹⁾	Vertical pump control or alarm, 316 SST	752 °F (400 °C)	435 psi (30 bar)	255 psi (17.6 bar)	★
F104/+ ⁽⁹⁾	Cranked arm: horizontal or vertical, 316 SST	752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	★
F93 ⁽¹⁰⁾	Shrouded for dirty liquids, 316 SST	356 °F (180 °C)	Atmospheric	Atmospheric	★
Expanded					
F185 ⁽⁸⁾	General purpose e.g. high/low alarm, Alloy 400	410 °F (210 °C)	500 psi (34.5 bar)	427 psi (29.5 bar)	
F264	Horizontal limited differential, Alloy 400	410 °F (210 °C)	464 psi (32 bar)	398 psi (27.5 bar)	
Typical Model Number: S 01 DB / F84					

- (1) See page 21 for nozzle and stud lengths.
- (2) The maximum process temperature is dependent on the Flange (Head) and selected Float option.
- (3) See page 17 for Mobrey flange information.
- (4) See Table 8 and Table 9 on page 16 for switch mechanism ratings.
- (5) Type DB is for alternative make and break circuits.
Type D6B is for switching two independent circuits.
- (6) Types PB and P6B are for switching low power (e.g. intrinsically safe) electrical circuits.
- (7) See Table 10 on page 18 for a comparison of the float options listed here.
- (8) Two off general purpose level switches can be used for pump control.
- (9) See pages 21, 22, and 23 for technical float details and length options.
- (10) A silicone rubber gaiter is supplied with the 316 SST shroud

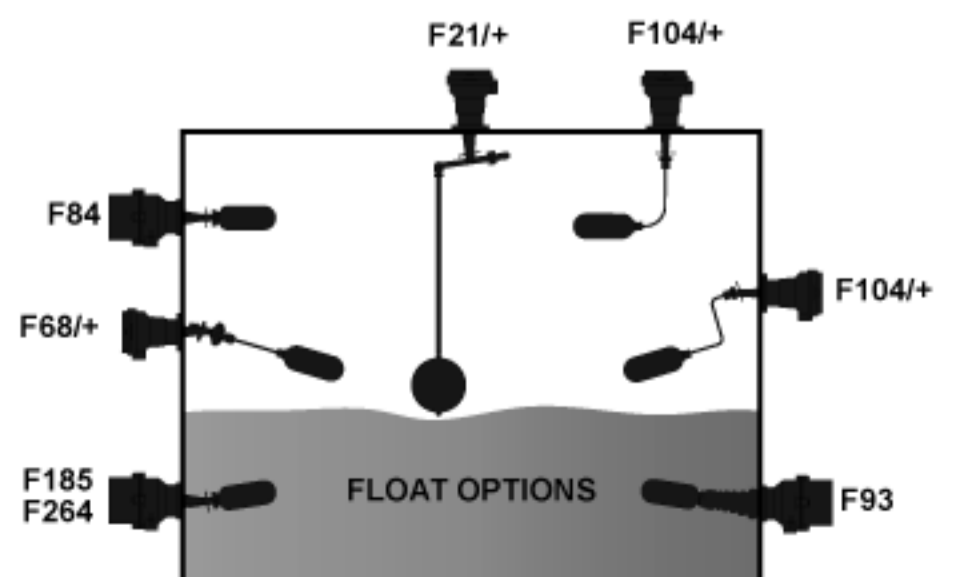

Horizontal Float Switches

Float Switches for General Purpose Applications (Stainless Steel Wetside)



S440DA/F84

- Weatherproof to IEC60529 (IP66)
- Carbon steel back flange (*excluding S36 and S190*) with guaranteed properties at high (752 °F/400 °C) and low (–58 °F/–50 °C) temperatures
- Ordinary location certification for CSA available – contact factory
- Marine approvals: Lloyds Register of Shipping (LRS), Germanischer Lloyd, DNV, ABS, and RMRS

Additional Information

Specifications: page 13
Dimensions: page 18

TABLE 2. Ordering Information For General Purpose Magnetic Float Switches (SST Wetside)

★The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.
The Expanded offering is subject to additional delivery lead time.


Model	Product Description				
S	Switch				
Flange (Head) ⁽¹⁾		Rating	Flange Standard		Max. T _{Process} ⁽²⁾
Standard					Standard
36 ⁽³⁾	Mobrey A ⁽⁴⁾	490 psi (33.8 bar)	Mobrey		752 °F (400 °C)
Expanded					
190 ⁽³⁾⁽⁵⁾	Mobrey A ⁽⁴⁾	490 psi (33.8 bar)	Mobrey		356 °F (180 °C)
440	3 in.	150 RF	ASME B16.5		752 °F (400 °C)
441	4 in.	150 RF	ASME B16.5		752 °F (400 °C)
424	3 in.	300 RF	ASME B16.5		752 °F (400 °C)
425	4 in.	300 RF	ASME B16.5		752 °F (400 °C)
489	3 in.	600 RF	ASME B16.5		752 °F (400 °C)
490	3 in.	900 RF	ASME B16.5		752 °F (400 °C)
428	DN 65	EN 1092-1 PN 16	ASME B16.5		752 °F (400 °C)
429	DN 80	EN 1092-1 PN 16	EN 1092-1		752 °F (400 °C)
430	DN 100	EN 1092-1 PN 16	EN 1092-1		752 °F (400 °C)
431	DN 125	EN 1092-1 PN 16	EN 1092-1		752 °F (400 °C)
417	DN 65	EN 1092-1 PN 40	EN 1092-1		752 °F (400 °C)
418	DN 80	EN 1092-1 PN 40	EN 1092-1		752 °F (400 °C)
419	DN 100	EN 1092-1PN 40	EN 1092-1		752 °F (400 °C)
433	DN 125	PN 40	EN 1092-1		752 °F (400 °C)
434	DN 150	PN 40	EN 1092-1		752 °F (400 °C)
488	DN 80	PN 63	EN 1092-1		752 °F (400 °C)
435	DN 100	PN 63	EN 1092-1		752 °F (400 °C)
436	DN 125	PN 63	EN 1092-1		752 °F (400 °C)
437	DN 150	PN 63	EN 1092-1		752 °F (400 °C)
Switch Mechanism ⁽⁶⁾					Max. T _{Process} ⁽²⁾
Standard					Standard
D ⁽⁷⁾	Electrical: 2 independent Single Pole Single Throw (SPST) contact sets				752 °F (400 °C)
P ⁽⁸⁾	As Type D but with <i>gold plated contacts</i>				752 °F (400 °C)
Expanded					
D6 ⁽⁹⁾	Electrical: 2 independent circuits of double pole changeover contact sets				752 °F (400 °C)
P6 ⁽⁸⁾	As Type D6 but with <i>gold plated contacts</i>				752 °F (400 °C)
H6 ⁽¹⁰⁾	As Type D6 but with <i>gold plated contacts and hermetically sealed moving parts</i>				482 °F (250 °C)

TABLE 2. Ordering Information For General Purpose Magnetic Float Switches (SST Wetside)

★The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.
The Expanded offering is subject to additional delivery lead time.

B6	As Type H6 but <i>approved for Zone 2 areas</i>			482 °F (250 °C)	
AP	Pneumatic air pilot valve on/off for switching air circuits			752 °F (400 °C)	
AM	Pneumatic air pilot valve for continuous modulating of air controlled circuits			752 °F (400 °C)	
Enclosure / Housing					
Standard					Standard
A	Aluminum alloy				★
Float ⁽¹¹⁾		Max. T_{Process} ⁽²⁾	Max. P @ T_{Room}	Max. P @ T_{Max}	
Standard					Standard
F84 ⁽¹²⁾	General purpose e.g. high/low alarm, 316 SST	752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	★
F68/+ ⁽¹³⁾	Horizontal pump control or alarm, 316 SST	752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	★
F21/+ ⁽¹³⁾	Vertical pump control or alarm, 316 SST	752 °F (400 °C)	435 psi (30 bar)	255 psi (17,6 bar)	★
F104/+ ⁽¹³⁾	Cranked arm: horizontal or vertical, 316 SST	752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	★
F93 ⁽⁵⁾⁽¹⁴⁾	Shrouded for dirty liquids, 316 SST	356 °F (180 °C)	Atmospheric	Atmospheric	★
Expanded					
F96 ⁽¹²⁾	General purpose e.g. high/low alarm, 316 SST	752 °F (400 °C)	1073 psi (74 bar)	616 psi (42.5 bar)	
F98 ⁽¹²⁾	General purpose e.g. high/low alarm, 316 SST	752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	
F106 ⁽¹²⁾	General purpose e.g. high/low alarm, 316 SST	752 °F (400 °C)	1073 psi (74 bar)	616 psi (42.5 bar)	
F107 ⁽¹²⁾	General purpose e.g. high/low alarm, 316 SST	752 °F (400 °C)	2900 psi (200 bar)	1667 psi (115 bar)	
F88	Interface duties, 316 SST	752 °F (400 °C)	1075 psi (74 bar)	623 (43 bar)	
Typical Model Number: S 36 D A / F84					

- (1) See page 21 for nozzle and stud lengths.
- (2) The maximum allowed process temperature is dependent on Flange (Head), Switch mechanism, and Float options chosen.
- (3) There is no back flange fitted to the S36 and S190 flange (head).
- (4) See page 17 for Mobrey flange information.
- (5) The F93 float and S190 flange (head) can only be used together.
- (6) See Table 8 and Table 9 on page 16 for switch mechanism ratings.
- (7) Type D is for alternative make and break circuits.
- (8) Types P and P6 are for switching low power (e.g. intrinsically safe) electrical circuits.
- (9) Type D6 is for switching two independent circuits.
- (10) Type H6 is for use in corrosive area and low temperature applications.
- (11) See Table 10 on page 18 for a comparison of the float options listed here.
- (12) Two off general purpose level switches can be used for pump control.
- (13) See pages 21, 22, and 23 for technical float details and length options.
- (14) A silicone rubber gaiter is supplied with the 316 SST shroud

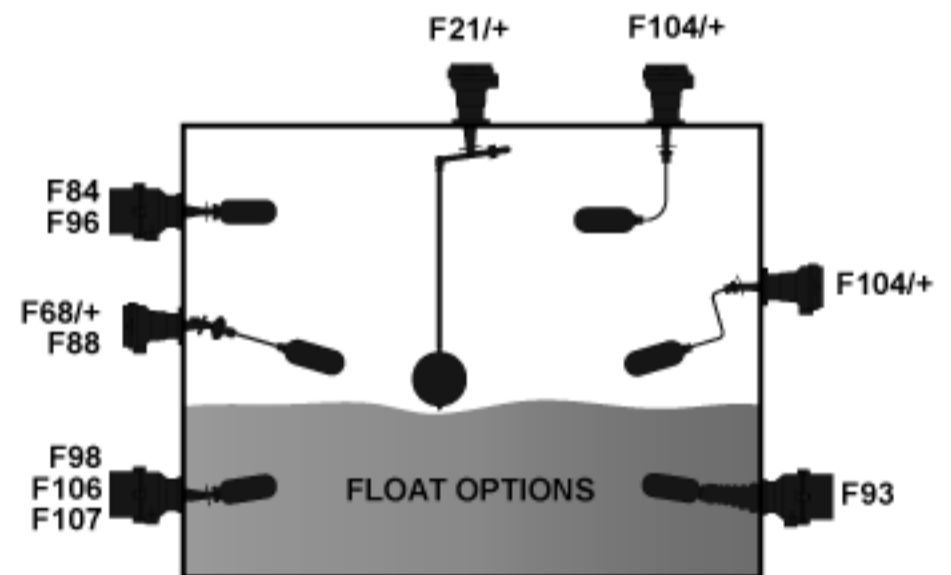

Horizontal Float Switches

Float Switches for Hazardous Area Applications

- ATEX/IECEX Zone 1 Gas Group IIC, CSA Class 1: Group CD (*contact factory*), and Lloyds Register of Shipping (LRS) approvals
- Carbon steel back flange (*excluding S250 and S275*) with guaranteed properties at high 752 °F (400 °C) and low -58 °F (-50 °C) temperatures.
- Weatherproof to IEC60529 (IP66)



S250DA/F84

Additional Information

Specifications: page 14

Dimensions: page 19

TABLE 3. Ordering Information For Magnetic Float Switch In Hazardous Areas

★The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.


Model	Product Description				
S	Switch				
Flange (Head) ⁽¹⁾		Rating	Wetside		Max. T _{Process} ⁽²⁾
Standard					Standard
250 ⁽³⁾	Mobrey G ⁽⁴⁾	304.5 psi (21 bar)	316 Stainless Steel		626 °F (330 °C) ★
275 ⁽³⁾	Mobrey G ⁽⁴⁾	304.5 psi (21 bar)	Gunmetal		392 °F (200 °C) ★
Expanded					
256	3 in.	150 RF	ASME B16.5		752 °F (400 °C)
257	4 in.	150 RF	ASME B16.5		752 °F (400 °C)
278	6 in.	150 RF	ASME B16.5		752 °F (400 °C)
251	3 in.	300 RF	ASME B16.5		752 °F (400 °C)
254	4 in.	300 RF	ASME B16.5		752 °F (400 °C)
260	3 in.	600 RF	ASME B16.5		752 °F (400 °C)
261	3 in.	900 RF	ASME B16.5		752 °F (400 °C)
253	DN 80	PN 40	EN 1092-1		752 °F (400 °C)
255	DN 100	PN 40	EN 1092-1		752 °F (400 °C)
269	DN 125	PN 40	EN 1092-1		752 °F (400 °C)
272	DN 80	PN 63	EN 1092-1		752 °F (400 °C)
268	DN 100	PN 63	EN 1092-1		752 °F (400 °C)
270	DN 125	PN 63	EN 1092-1		752 °F (400 °C)
271	DN 150	PN 63	EN 1092-1		752 °F (400 °C)
Switch Mechanism ⁽⁵⁾					Max. T _{Process} ⁽²⁾
Standard					Standard
D ⁽⁶⁾	Electrical: 2 independent Single Pole Single Throw (SPST) contact sets				752 °F (400 °C) ★
P ⁽⁷⁾	As Type D but with <i>gold plated contacts</i>				752 °F (400 °C) ★
Expanded					
D6 ⁽⁸⁾	Electrical: 2 independent circuits of double pole changeover contact sets				752 °F (400 °C)
P6 ⁽⁷⁾	As Type D6 but with <i>gold plated contacts</i>				752 °F (400 °C)
H6 ⁽⁹⁾	As Type D6 but with <i>gold plated contacts and hermetically sealed moving parts</i>				482 °F (250 °C)
Enclosure / Housing					Max. T _{Process} ⁽²⁾
Standard					Standard
A	Aluminum alloy				752 °F (400 °C) ★
Expanded					
G	Gunmetal				662 °F (350 °C)
X ⁽¹⁰⁾	Use 'AX' or 'GX' for applications with ambient temperatures -4 to -76 °F (-20 to -60 °C)				As 'A' or 'G' codes

TABLE 3. Ordering Information For Magnetic Float Switch In Hazardous Areas

★The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.
The Expanded offering is subject to additional delivery lead time.

Float ⁽¹¹⁾		Max. T _{Process} ⁽²⁾	Max. P @ T _{Room}	Max. P @ T _{Max}	
Standard					Standard
F84 ⁽¹²⁾	General purpose e.g. high/low alarm, 316 SST	752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	★
F185 ⁽¹²⁾	General purpose e.g. high/low alarm, Alloy 400	410 °F (210 °C)	500 psi (34.5 bar)	427 psi (29.5 bar)	★
F68/+ ⁽¹³⁾	Horizontal pump control or alarm, 316 SST	752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	★
F21/+ ⁽¹³⁾	Vertical pump control or alarm, 316 SST	752 °F (400 °C)	435 psi (30 bar)	255 psi (17.6 bar)	★
F104/+ ⁽¹³⁾	Cranked arm: horizontal or vertical, 316 SST	752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	★
Expanded					
F98 ⁽¹²⁾	General purpose e.g. high/low alarm, 316 SST	752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	
F106 ⁽¹²⁾	General purpose e.g. high/low alarm, 316 SST	752 °F (400 °C)	1073 psi (74 bar)	616 psi (42.5 bar)	
F107 ⁽¹²⁾	General purpose e.g. high/low alarm, 316 SST	752 °F (400 °C)	2900 psi (200 bar)	1667 psi (115 bar)	
F264	Horizontal limited differential, Alloy 400	410 °F (210 °C)	464 psi (32 bar)	398 psi (27.5 bar)	
F88	Interface duties, 316 SST	752 °F (400 °C)	1073 psi (74 bar)	623 (43 bar)	
Typical Model Number: S 250 D A / F84					

- (1) See page 21 for nozzle and stud lengths.
- (2) The maximum allowed process temperature is dependent on the Flange (Head), Switch mechanism, Enclosure/Housing, and Float options chosen.
- (3) There is no back flange fitted to the S250 and S275 flange (head).
- (4) See page 17 for Mobrey flange information.
- (5) See Table 8 and Table 9 on page 16 for switch mechanism ratings.
- (6) Type D is for alternative make and break circuits.
- (7) Types P and P6 are for switching low power (e.g. intrinsically safe) electrical circuits.
- (8) Type D6 is for switching two independent circuits.
- (9) Type H6 is for use in corrosive area and low temperature applications.
- (10) The ATEX certification covering -4 to -76 °F (-20 to -60 °C) requires Mechanism Switch code H6 to be selected.
- (11) See Table 11 on page 19 for a comparison of the float options listed here.
- (12) Two off general purpose level switches can be used for pump control.
- (13) See pages 21, 22, and 23 for technical float details and length options.

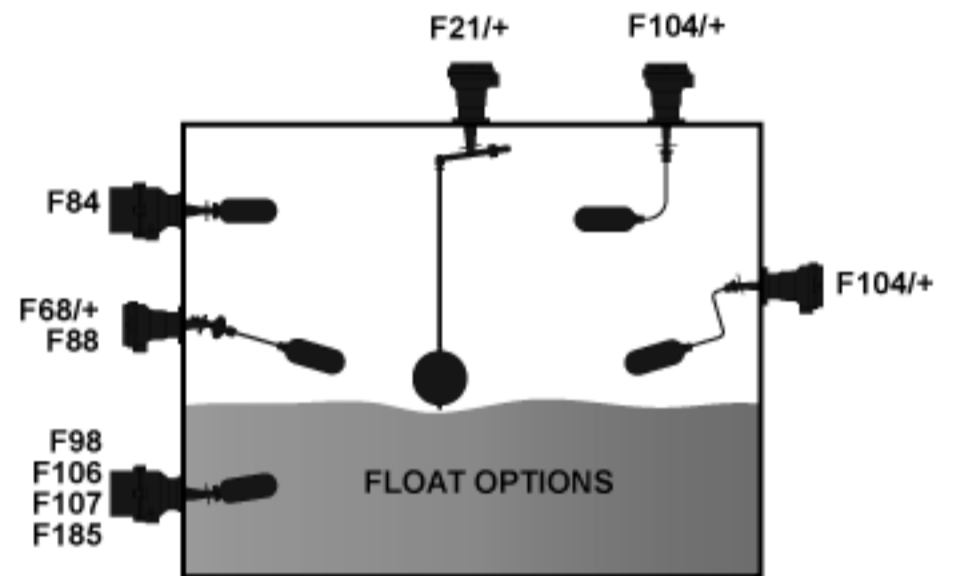

Horizontal Float Switches

Float Switches for Marine Applications



Aluminum Bronze



316 Stainless Steel



Hazardous Area

- **Submersible** (S03, S163 and S195)
- **Hoseproof** (S179 and S181)
- **Hazardous Area Submersible/Hoseproof** (S183, S187, and S189), designed for submersion in vented tanks, and mounting in an outside tank
- Aluminum bronze or stainless steel enclosure and wetside
- May be submerged to 100 ft. (30 m) head of water (IP68)
- Hazardous Area ATEX approval for Zone 1, Gas Group IIC
- Marine approvals: Lloyds Register of Shipping (LRS), Germanischer Lloyd, DNV, ABS, BV, RINA, and RMRS

Additional Information

Specification: page 15

Dimensions: page 20

TABLE 4. Ordering Information For Magnetic Float Switches In Marine Applications

★The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.

The Expanded offering is subject to additional delivery lead time.

Model	Product Description					
S	Switch					
Flange (Head)	Wetside/Enclosure	Duty	IP Rating	Max. T _{Process} ⁽¹⁾		
Standard					Standard	
179 ⁽²⁾	Mobrey A, 261 psi/18 bar	Aluminum Bronze	Hoseproof	See Table 5 on page 9	★	
Expanded						
03 ⁽²⁾	Mobrey A, 261 psi/18 bar	Aluminum Bronze	Submersible	See Table 5 on page 9 for the IP Ratings and Maximum Process Temperatures		
195 ⁽²⁾	Mobrey A, 261 psi/18 bar	Aluminum Bronze	Submersible			
163 ⁽²⁾	Mobrey A, 261 psi/18 bar	316 Stainless Steel	Submersible			
181 ⁽²⁾	Mobrey A, 261 psi/18 bar	316 Stainless Steel	Hoseproof			
183 ⁽²⁾	Mobrey A, 261 psi/18 bar	Aluminum Bronze	Hazard Submersible			
187 ⁽²⁾	Mobrey A, 261 psi/18 bar	Aluminum Bronze	Hazard Submersible			
189 ⁽²⁾	Mobrey A, 261 psi/18 bar	Aluminum Bronze	Hazard Hoseproof			
Switch Mechanism ⁽³⁾				Max. T _{Process} ⁽¹⁾		
Standard					Standard	
D ⁽⁴⁾	Electrical: 2 independent Single Pole Single Throw (SPST) contact sets			752 °F (400 °C)	★	
P ⁽⁵⁾	As Type D but with <i>gold plated contacts</i>			752 °F (400 °C)	★	
Expanded						
D6 ⁽⁴⁾⁽⁶⁾	Electrical: 2 independent circuits of double pole changeover contact sets			752 °F (400 °C)		
P6 ⁽⁵⁾⁽⁶⁾	As Type D6 but with <i>gold plated contacts</i>			752 °F (400 °C)		
Enclosure Housing						
Standard					Standard	
B	Aluminum bronze (<i>no code is required for stainless steel S163 and S181 models</i>)				★	
Cable				Max. T _{Process} ⁽¹⁾		
Standard					Standard	
L	10 ft. (3 m) of fitted cable (<i>code is required for S03, S163, S195, S183, and S187 models</i>)			See Table 5	★	
Float ⁽⁷⁾		Max. T _{Process} ⁽¹⁾	Max. P @ T _{Room}	Max. P @ T _{Max}		
Standard					Standard	
F84 ⁽⁸⁾	General purpose e.g. high/low alarm, 316 SST		752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	★
F185 ⁽⁸⁾	General purpose e.g. high/low alarm, Alloy 400		410 °F (210 °C)	500 psi (34.5 bar)	427 psi (29.5 bar)	★
F68/+ ⁽⁹⁾	Horizontal pump control or alarm, 316 SST		752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	★

TABLE 4. Ordering Information For Magnetic Float Switches In Marine Applications

★The Standard offering represents the most common options. The starred options (★) should be selected for best delivery.
The Expanded offering is subject to additional delivery lead time.

F21/+(9)	Vertical pump control or alarm, 316 SST	752 °F (400 °C)	435 psi (30 bar)	255 psi (17.6 bar)	★
F104/+(9)	Cranked arm: horizontal or vertical, 316 SST	752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	★
F93(10)(11)	Shrouded for dirty liquids, 316 SST	356 °F (180 °C)	Atmospheric	Atmospheric	★
Expanded					
F98(8)	General purpose e.g. high/low alarm, 316 SST	752 °F (400 °C)	500 psi (34.5 bar)	290 psi (20 bar)	
F264	Horizontal limited differential, Alloy 400	410 °F (210 °C)	464 psi (32 bar)	398 psi (27.5 bar)	
Typical Model Number: S 03 D B L / F84					

- (1) The maximum process temperature is dependent on the Flange (Head), Switch mechanism, Cable (if fitted), and Float options chosen.
- (2) See page 17 for Mobrey flange information.
- (3) See Table 8 and Table 9 on page 16 for switch mechanism ratings.
- (4) Type D is for alternative make and break circuits. Type D6 is for switching two independent circuits.
- (5) Types P and P6 are for switching low power (e.g. intrinsically safe) electrical circuits.
- (6) Not available for stainless steel enclosure and wetside models S163 and S181.
- (7) See Table 11 on page 19 for a detailed comparison of the float types listed here.
- (8) Two off general purpose level switches can be used for pump control.
- (9) Refer to pages 21, 22, and 23 for technical float details and length options. See "Nozzle and Stud Lengths" on page 21 for stud lengths.
- (10) A silicone rubber gaiter is supplied with the 316 SST shroud
- (11) Shrouded floats for stainless steel switches S163 and S181 are available only on request. Please contact the factory.

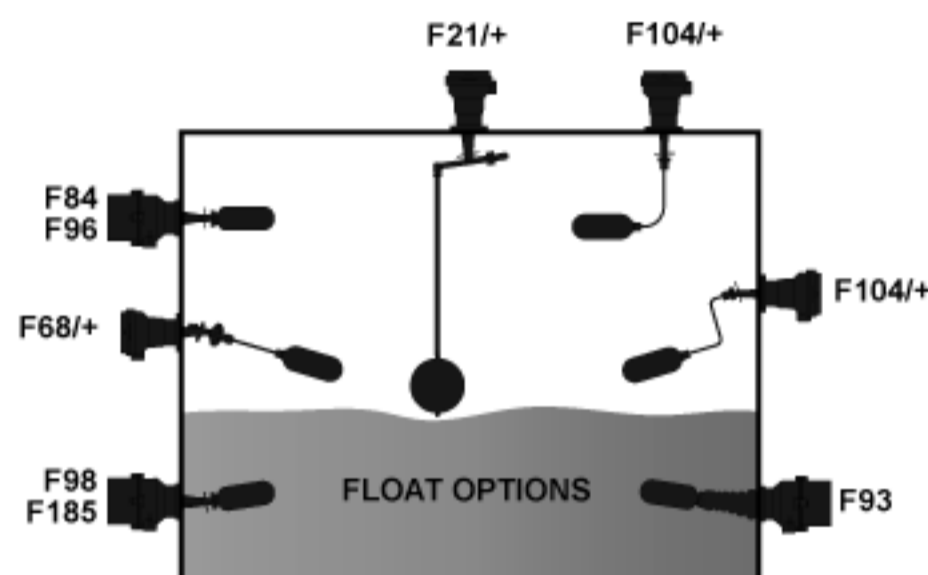


TABLE 5. Switch Type Comparison – Marine Applications

Type Number	Maximum T _{Process} ⁽¹⁾		Head IP Rating	Cable ⁽²⁾
	Submersed	Non-submersed		
S03	176 °F (80 °C)	410 °F (210 °C)	66/68 (100 ft. / 30 m)	MICC (10 ft. / 3 m)
S179	212 °F (100 °C)	410 °F (210 °C)	66 ⁽³⁾	None fitted
S195	122 °F (50 °C)	410 °F (210 °C)	66/68 (100 ft. / 30 m)	CSP (10 ft. / 3 m)
S163	176 °F (80 °C)	410 °F (210 °C)	66/68 (100 ft. / 30 m)	MICC (10 ft. / 3 m)
S183	122 °F (50 °C)	410 °F (210 °C)	66/68 (100 ft. / 30 m)	CSP (10 ft. / 3 m)
S181	212 °F (100 °C)	410 °F (210 °C)	66 ⁽³⁾	None fitted
S187	122 °F (50 °C) ⁽⁴⁾	410 °F (210 °C)	66/68 (100 ft. / 30 m)	MICC (10 ft. / 3 m)
S189	140 °F (60 °C)	410 °F (210 °C)	66 ⁽⁵⁾	None fitted

- (1) The maximum process temperature is dependent on the Flange (Head), Switch mechanism, and Float options chosen.
- (2) See page 15 for cable specification.
- (3) S179 and S181 may be submersed to 100 ft. (30 m) head of water with temperatures between 34 and 212 °F (1 and 100 °C). Fitting and testing of customer supplied cable and cable gland is the customer's responsibility. The cable and cable gland may limit the temperature further.
- (4) The maximum process temperature for submersed S187 is 176 °F/80 °C (for non-approved) or 122 °F/50 °C (for ATEX approved).
- (5) S189 may be submersed to 100 ft. (30 m) head of water with temperatures between 34 and 140 °F (1 and 60 °C). Fitting and testing of customer supplied cable and cable gland is the customer's responsibility. The cable and cable gland may limit the temperature further.

Horizontal Float Switches

Spare Parts and Accessories

TABLE 6. Spare Parts and Accessories

★The Standard offering represents the most common options. The starred options (★) should be selected for best delivery. The Expanded offering is subject to additional delivery lead time.

Spare Parts and Accessories		
Standard		Standard
TD 110/A	316 stainless steel test device for Mobrey 'A' flanged switches, sandwich (see Figure 1)	★
TD 111/A	Carbon steel test device for Mobrey 'A' flanged switches, weld on (see Figure 1)	★
Expanded		
71020/107	316 stainless steel welding pad for Mobrey 'A' flanged switches (see Figure 2)	
J184	Carbon steel welding pad for Mobrey 'A' flanged switches (see Figure 2)	
J786	Carbon steel welding nozzle for Mobrey 'A' flanged switches (see Figure 2)	
71030/900	316 stainless steel backing flange for Mobrey 'A' flanged switches (see Figure 2)	
J863	Carbon steel backing flange for Mobrey 'A' flanged switches (see Figure 2)	
J800	Carbon steel welding pad for Mobrey 'G' flanged switches (see Figure 3)	
71020/111	316 stainless steel welding pad for Mobrey 'G' flanged switches (see Figure 3)	
J799	Carbon steel welding nozzle for Mobrey 'G' flanged switches (see Figure 3)	

NOTE:

See page 17 for dimensions of Mobrey flanges.

Figure 1. Test Devices for Mobrey 'A' Flanged Switches

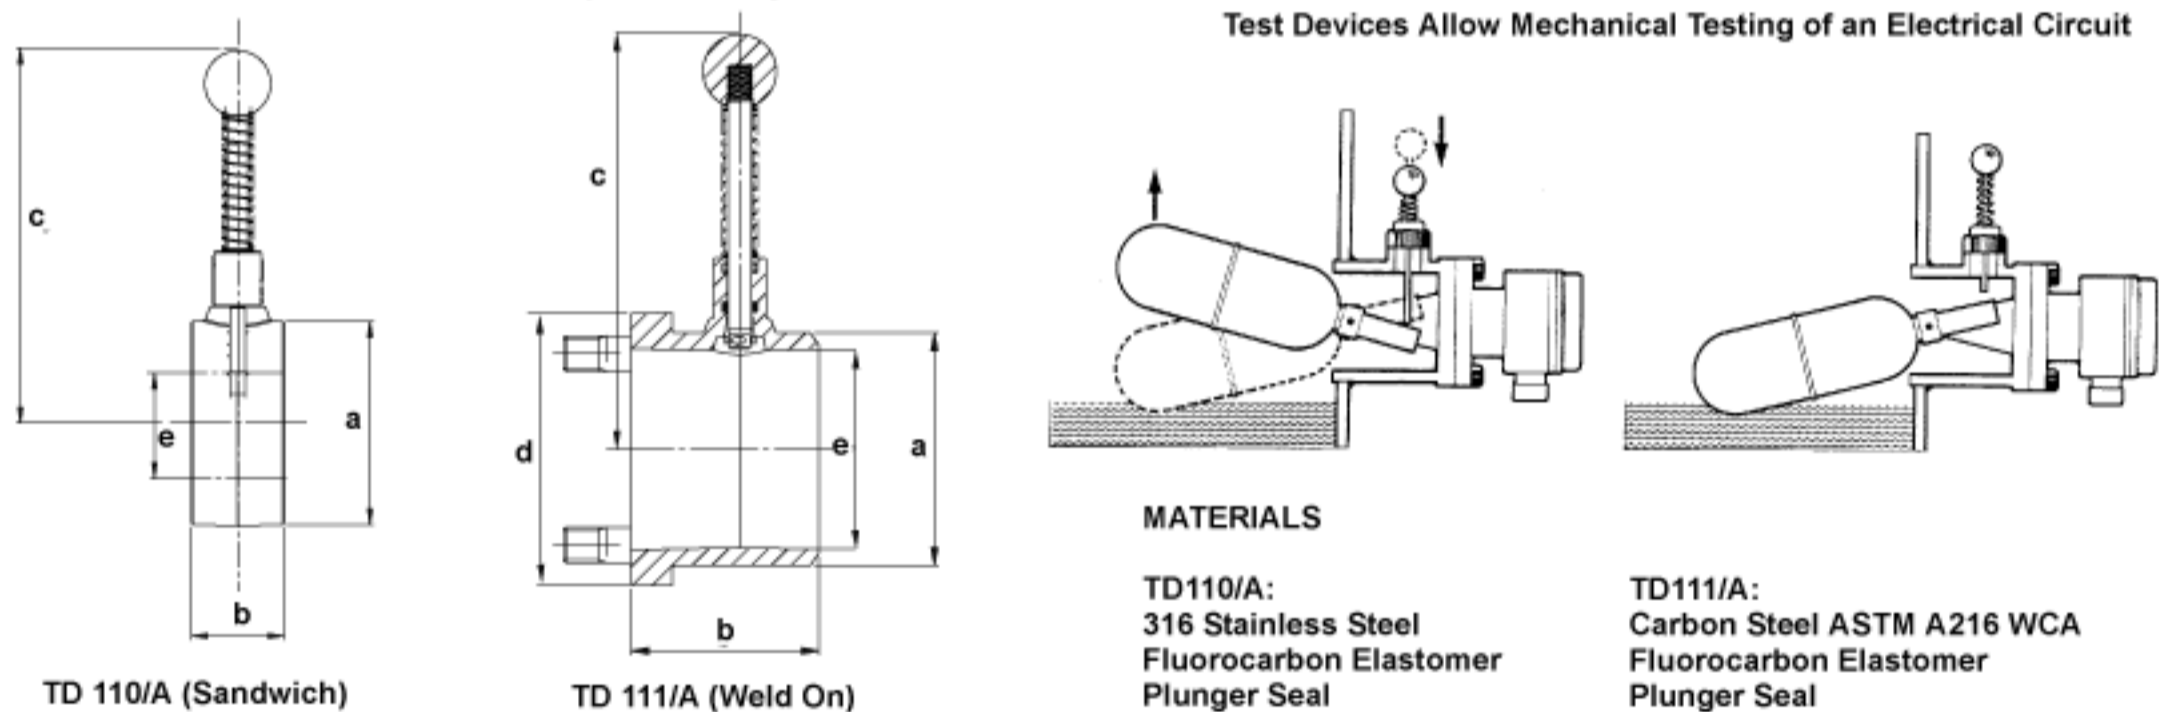


TABLE 7. Test Device Specification and Dimensions

Type	Vessel Flange	Maximum Pressure ⁽¹⁾	Maximum T _{Process}	Øa in. (mm)	Øb in. (mm)	Øc in. (mm)	d ² in. (mm)	Øe in. (mm)
TD 110/A	Mobrey 'A'	261 psi (18 bar)	410 °F (210 °C)	3.02 (77)	1.38 (35)	5.59 (142)	N/A	2.64 (67)
TD 111/A	Weld on	261 psi (18 bar)	410 °F (210 °C)	3.11 (79)	2.52 (64)	5.59 (142)	3.62 ² (92 ²)	2.64 (67)

(1) 182 psi (12.6 bar) at maximum temperature of 410 °F (210 °C)

Float Chambers

Float chambers are used to facilitate the external mounting of a Mobrey Magnetic Level Switch onto a tank or pressure vessel, particularly where space inside the vessel is restricted or where the control must be isolated for routine maintenance whilst the plant is in operation.


A wide range of **cast** or **fabricated** chambers is available. Exotic materials are also available.

Process connections may be specified as top-and-bottom or side-and-side, and can be flanged, screwed or butt welded in a choice of sizes to suit most plant installations.


Please contact the factory for further information.



Figure 2. Companion Flanges for Mobrey 'A' Flange Switches

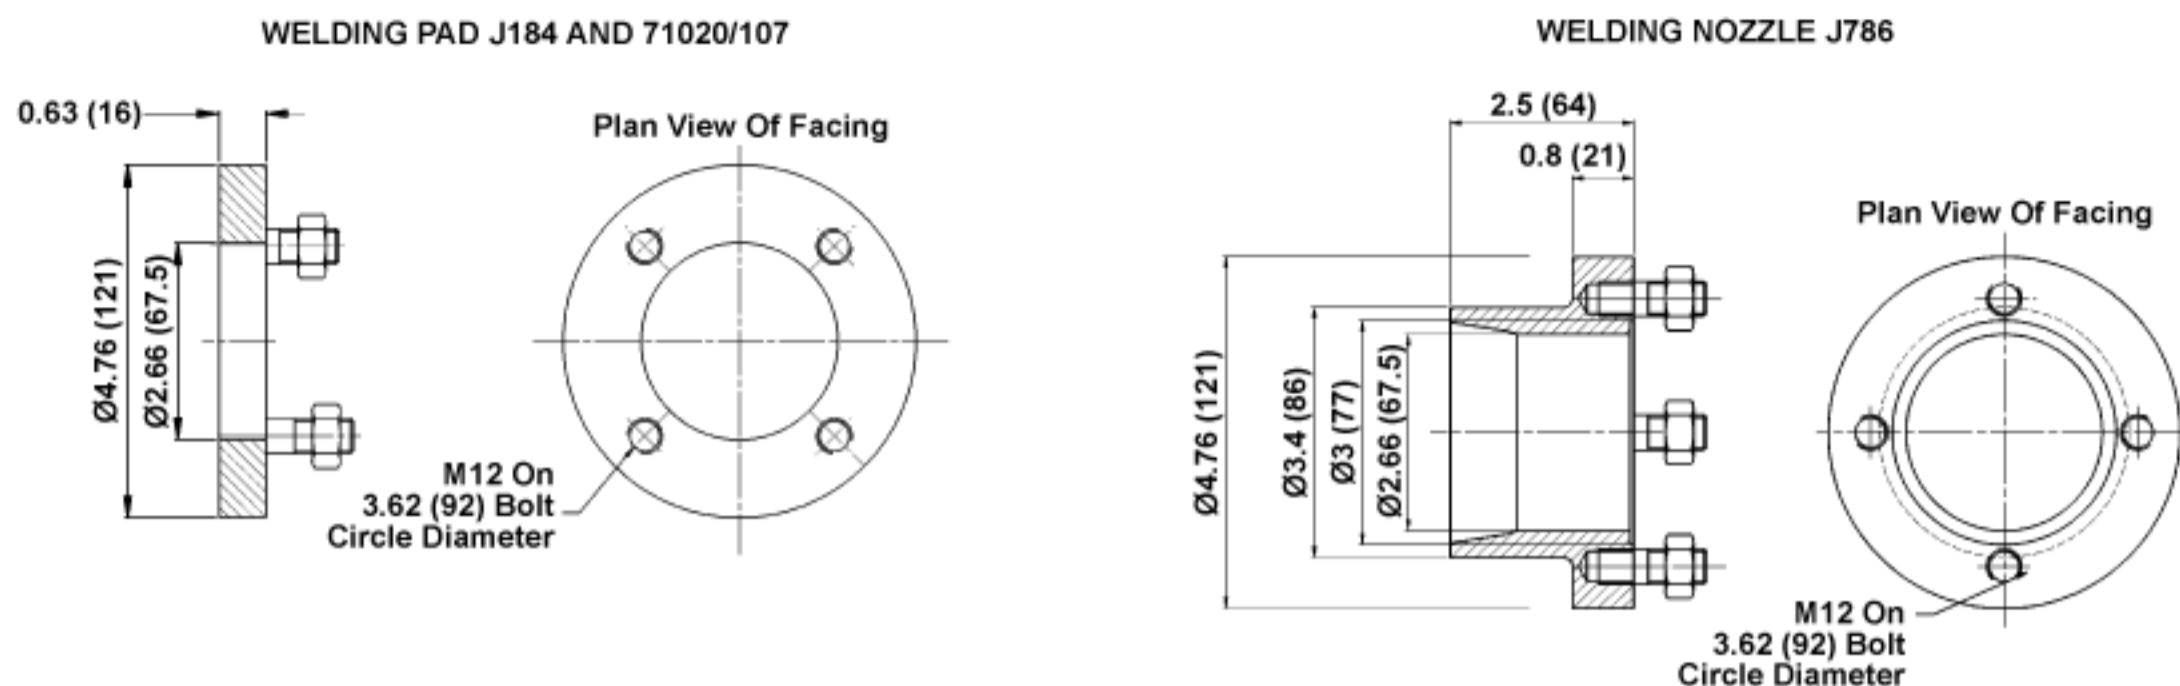


BACKING FLANGE J863 AND 71030/900

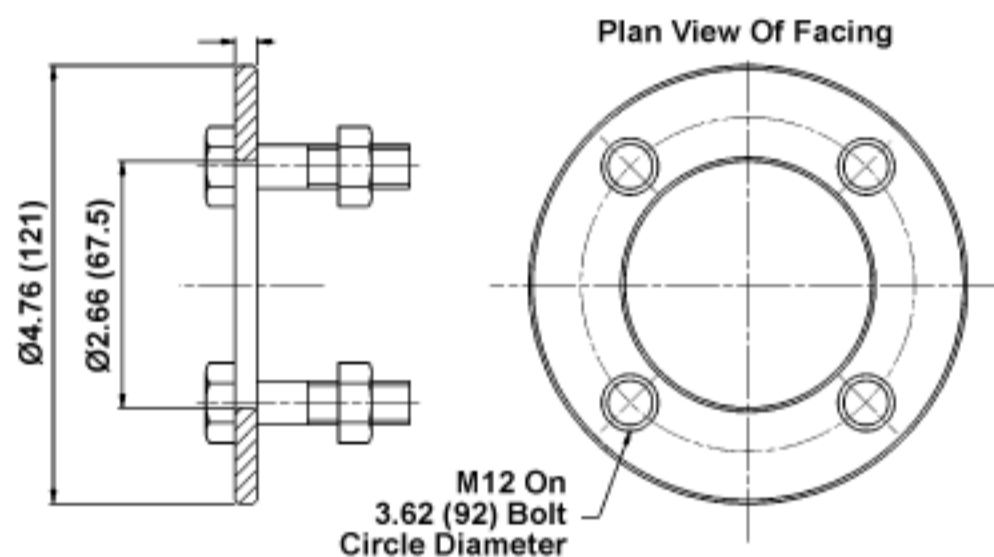

Note: Dimensions are in inches (mm)

Figure 3. Companion Flanges for Mobrey 'G' Flange Switches

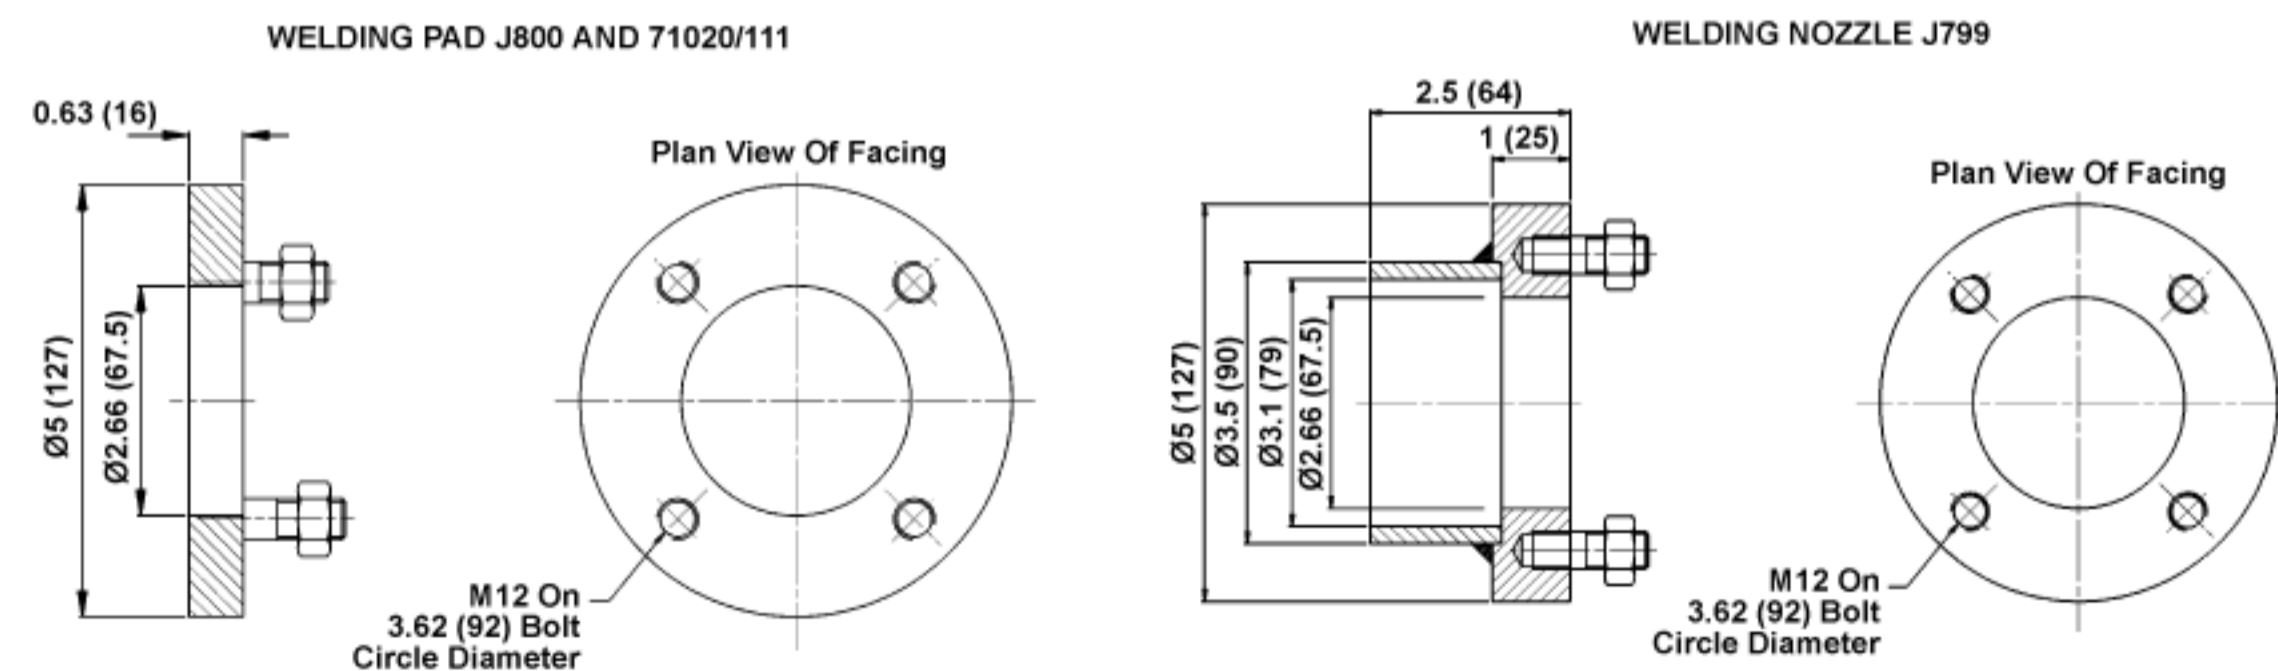

Note: Dimensions are in inches (mm)

NOTE:

- Backing flange J863 is zinc plated and passivated
- Welding types supplied complete with studs and nuts
- Backing type supplied complete with bolts, sealing washers, and full face gasket
- Other materials available upon request

Horizontal Float Switches

Specifications

FLOAT SWITCH SPECIFICATIONS

Float Switch Specification – General Applications (Aluminum Bronze Wetside)

Electrical Models	
Enclosure and Wetside	Aluminum bronze to BS1400 – AB1 maximum iron content 2.5%
End Cap	Short (4 contacts) e.g. S01DB, Aluminum BS1490 – grade LM24
	Long (6 contacts) e.g. S01D6B, Brass BS1400 – DCB3
Cable Gland (Supplied With S01DB Only)	Nickel-plated brass gland with a fully insulated polychloroprene-nitrile rubber CR/NBR gasket seal. Clamping range for 8 to 13 mm OD cable
	Maximum ambient temperature is 176 °F (80 °C)
Maximum Process Temperature	410 °F (210 °C). <i>If shrouded float F93 used, maximum is 356 °F (180 °C)</i>
Gasket Material	Non-asbestos sheet material gaskets to BS 7531 Grade X, which has upper temperature limits of 482 °F (250 °C) for gas, vapor, and steam, and 824 °F (440 °C) for liquids
Dimensions	See “General Purpose Magnetic Float Switches (Aluminum Bronze Wetside)” on page 17
Air Pilot Valve Models	
Enclosure	Aluminum Alloy to BS 1490: Grade LM24
Valve Block	Aluminum Alloy to BS 1490: Grade LM25
Finish	All external aluminum surfaces are chromate phosphate treated, and then externally painted
Maximum Process Temperature	410 °F (210 °C). <i>If shrouded float F93 used, maximum is 356 °F (180 °C)</i>
Gasket Material	Non-asbestos sheet material gaskets to BS 7531 Grade X, which has upper temperature limits of 482 °F (250 °C) for gas, vapor, and steam, and 824 °F (440 °C) for liquids
Dimensions	See “General Purpose Magnetic Float Switches (Aluminum Bronze Wetside)” on page 17
Approvals ⁽¹⁾	
UK	Lloyds Register of Shipping (LRS)
Germany	Germanischer Lloyd
Canada	CSA (Special order, contact factory)
USA	ABS
France	BV
Italy	Rina
Russia	RMRS
Norway	DNV

(1) Other approvals available. Please contact us with your requirements.

Float Switch Specification – General Purpose Applications (Stainless Steel Wetside)

Electrical Models	
Enclosure Housing Material	Aluminum alloy to BS 1490: Grade LM24
Wetside material	316 Stainless steel (to Mobrey Standard) 316S33 Stainless steel for S489 and S490 switch types
Back Flange (Excludes S36 and S190)	Carbon steel to BS 1501: 224 Grade 430B LT50 This material has guaranteed properties at high 752 °F (400 °C) and low –58 °F (–50 °C) temperatures
Cable Gland (Supplied With S36 only)	Nickel-plated brass gland with a fully insulated polychloroprene-nitrile rubber CR/NBR gasket seal. Clamping range for 8 to 13 mm OD cable Maximum ambient temperature is 176 °F (80 °C)
Maximum Process Temperature	Dependent upon Flange (Head), Switch mechanism, and Float options chosen ⁽¹⁾ . Note: See “Gasket Material” below for gasket temperature limits
Gasket Material	Float switches with AMSE B16.5 Class 600 and Class 900 flanges are fitted with spiral wound non-asbestos filled gaskets rated to 752 °F (400 °C) Otherwise non-asbestos sheet material gaskets to BS 7531 Grade X, which has upper temperature limits of 482 °F (250 °C) for gas, vapor, and steam, and 824 °F (440 °C) for liquids. If the switch experiences gas vapor or steam temperatures above 482 °F (250 °C), then a suitable alternative gasket must be fitted
Dimensions	See “General Purpose Magnetic Float Switches (Stainless Steel Wetside)” on page 18
Air Pilot Valve Models	
Enclosure	Aluminum Alloy to BS 1490: Grade LM24
Valve Block	Aluminum Alloy to BS 1490: Grade LM25
Finish	All external aluminum surfaces are chromate phosphate treated, and then externally painted
Maximum Process Temperature	Dependent upon Flange (Head), Switch mechanism, and Float options chosen ⁽¹⁾ . Note: See “Gasket Material” below for gasket temperature limits
Connection	Brass compression couplings to suit 0.02 in. (6 mm) copper or nylon pipe (coupling thread 3/4-in BSP)
Gasket Material	Float switches with AMSE B16.5 Class 600 and Class 900 flanges are fitted with spiral wound non-asbestos filled gaskets rated to 752 °F (400 °C) Otherwise non-asbestos sheet material gaskets to BS 7531 Grade X, which has upper temperature limits of 482 °F (250 °C) for gas, vapor, and steam, and 824 °F (440 °C) for liquids. If the switch experiences gas vapor or steam temperatures above 482 °F (250 °C), then a suitable alternative gasket must be fitted
Dimensions	See “General Purpose Magnetic Float Switches (Stainless Steel Wetside)” on page 18
Approvals ⁽²⁾	
UK	Lloyds Register of Shipping (LRS)
Germany	Germanischer Lloyd
Canada	CSA (Special order, contact factory)
USA	ABS
Russia	RMRS
Norway	DNV

(1) See “Float Switches for General Purpose Applications (Stainless Steel Wetside)” on page 4 for maximum process temperature ratings of these options.

(2) Other approvals available. Please contact us with your requirements.

Horizontal Float Switches

Float Switch Specification – Hazardous Area Applications

General	
Enclosure/Housing Materials	Aluminum Alloy to BS 1490: Grade LM24 All external aluminum surfaces are chromate phosphate treated, and then externally stove painted
	Gunmetal to BS1400: LG2 Natural finish
Wetside Material	316 Stainless steel to Mobrey Standard (316S33 Stainless steel for S260 and S261 switches)
	Gunmetal to BS1400: LG2
Back Flange (Excludes S250 and S275)	Carbon steel to BS 1501: 224 Grade 430B LT50
	This material has guaranteed properties at high (752 °F/400 °C) and low (–58 °F/–50 °C) temperatures
Maximum Process Temperatures	Aluminum enclosure: 752 °F (400 °C); Gunmetal enclosure: 662 °F (350 °C) Note: See "Gasket Material" below for gasket temperature limits
	S275: 392 °F (200 °C)
Gasket Material	Float switches with AMSE B16.5 Class 600, Class 900, and EN 1092-1 PN 63 flanges are fitted with spiral wound non-asbestos filled gaskets rated to 752 °F (400 °C)
	Otherwise non-asbestos sheet material gaskets to BS 7531 Grade X, which has upper temperature limits of 482 °F (250 °C) for gas, vapor, and steam, and 440 °C for liquids. If the switch experiences gas vapor or steam temperatures above 482 °F (250 °C), then a suitable alternative gasket must be fitted
Ambient Temperatures Below 0°C	(i) Down to –4 °F (–20 °C) Standard enclosure/housing codes A or G are suitable
	(ii) Down to –76 °F (–60 °C) Specify Enclosure/Housing order codes "AX" or "GX" which are as standard but with ATEX certification to use down to –76 °F (–60 °C). Note: This is downrated to –76 °F (–50 °C) unless a Mobrey 'G' flange is fitted or low temperature back flange is specified
Dimensions	See "Hazardous Area Magnetic Float Switches" on page 19
Approvals ⁽¹⁾	
ATEX	II 1/2 G, Exd IIC T6 (Ta = –20 °C to 60 °C) Housing code AX or GX II 1/2 G, Ex d IIC T6 (Ta = –60 °C to 60 °C)
IECEX	Ex d IIC T6 (Ta = –20 °C to 60 °C) Housing code AX or GX, Ex d IIC T6 (a = –60 °C to 60 °C)
CSA ⁽²⁾	Canadian Standards Association, Class 1: Group CD
LRS	Lloyds Register of Shipping

(1) Other approvals available. Please contact us with your requirements.

(2) CSA certified products are available to special order.

Float Switch Specification – Marine Applications

Aluminum Bronze Wetside Models	
Enclosure and Wetside	Aluminum bronze to BS1400 – AB1 maximum iron content 2.5%
End Cap	Brass
Maximum Process Temperature	See Table 5 on page 9
Gasket Material	Non-asbestos sheet material gaskets to BS 7531 Grade X, which has upper temperature limits of 482 °F (250 °C) for gas, vapor, and steam, and 824 °F (440 °C) for liquids. If the switch experiences gas vapor or steam temperatures above 482 °F (250 °C), then a suitable alternative gasket must be fitted
Dimensions	See "Marine Magnetic Float Switches" on page 20.
Stainless Steel Wetside Models	
Enclosure and Wetside	Type 316 Stainless steel
End Cap	Aluminum bronze to BS1400 – AB1/C
Maximum Process Temperature	410 °F (210 °C) Note: See "Gasket Material" and "Cable" below for further temperature limits
Cable Gland ⁽¹⁾	Nickel-plated brass gland with a fully insulated polychloroprene-nitrile rubber CR/NBR gasket seal. Clamping range for 8 to 13 mm OD cable Maximum ambient temperature is 176 °F (80 °C)
Gasket Material	Non-asbestos sheet material gaskets to BS 7531 Grade X, which has upper temperature limits of 482 °F (250 °C) for gas, vapor, and steam, and 824 °F (440 °C) for liquids. If the switch experiences gas vapor or steam temperatures above 482 °F (250 °C), then a suitable alternative gasket must be fitted
Dimensions	See "Marine Magnetic Float Switches" on page 20
Cable ⁽²⁾	
MICC	Maximum Process Temperature limit: 176 °F (80 °C). 600V light duty grade mineral insulated copper clad cable
CSP	Maximum Process Temperature limit: 122 °F (50 °C). 600V/1000V grade ethylene-propylene rubber insulated flexible cable
Hazardous Area Approvals	
ATEX	II 2 G, Ex d IIC T6 (Ta = –20 °C to 60 °C) when submersed, in a vented tank application II 1/2 G, Ex d IIC T6 (Ta = –20 °C to 60 °C) when outside, in a tank mounted application
Approvals ⁽³⁾	
UK	Lloyds Register of Shipping
Germany	Germanischer Lloyd
USA	ABS
France	BV
Italy	RINA
Russia	RMRS
Norway	DNV

(1) For S279 only, cable gland is supplied loose in the box. Fitting of the gland is the customer's responsibility.
Types S03, S195, S163, S183, and S187 are supplied with a pre-fitted cable gland

(2) See Table 5 on page 9 for marine application switches supplied with a fitted cable.

(3) Other approvals available. Please contact us with your requirements.

Horizontal Float Switches

SWITCH MECHANISM SPECIFICATIONS

TABLE 8. Electrical Switch Mechanism

Electrical Switch Specification	D and D6	P and P6	H6 and B6
Contact Material	Fine Silver	Gold Plated	Gold Plated
Process Temperature	-22 to 752 °F (-30 to 400 °C)	-22 to 752 °F (-30 to 400 °C)	-148 to 482 °F (-100 to 250 °C)
Ambient Temperature	-22 to 158 °F (-30 to 70 °C)	-22 to 158 °F (-30 to 70 °C)	-76 to 158 °F (-60 to 70 °C)
Insulation Value	(live to earth) > 100 MEG OHM		
Terminals	D and P: M4 screws with non-rotational clamp plates. D6, P6, H6, and B6: 6-way terminal block with pressure plates		

Electrical Specification	AC	DC Inductive ⁽¹⁾	DC Resistive ⁽¹⁾
Maximum Voltage V	440	240	240
Maximum Current A	5.0 ⁽²⁾	1.0	2.0
Maximum Power	2000VA	35 Watts	70 Watts
	Power Factor 0.4 Minimum	Time Constant 40 ms Maximum	

(1) **WARNING:** The plating of gold contact switches may be permanently damaged if the mechanism is used to switch circuits above the following limits: 300V:12mA Resistive; 24V: 2mH/200mA Inductive; 24V: 250mA Resistive; and 24V: 750mH/10mA Inductive

(2) Maximum current for Type D is 8 A up to 210 °C.

TABLE 9. Pneumatic Switch Mechanism

Pneumatic Switch Specification	AP	AM
Purpose	For switching circuits	For modulating air controlled circuits
Function	Change over	Continuous modulation
Air Pressure	Max. air pressure through valve is 100 psi (7 bar) Max. air flow through valve is 66 l/m at 7 bar Air must be clean and dry. Nom. leakage rate 0.2%	Max. air pressure through valve is 20 psi (1.4 bar)
Other	Brass compression couplings to suit 0.02 in. (6 mm) copper or nylon pipe (coupling thread is 1/4-in. BSP) Process Temperature: 34 to 752 °F (1 to 400 °C) Ambient Temperature: 34 to 140 °F (1 to 60 °C)	

Type D and P



Type D6 and P6





Type H6 and B6




Type AP and AM



Types D and P



AA Makes on rising level



BB Makes on falling level

Types D6, P6, H6, and B6




A1 - A2 B1 - B3 Makes on rising level



A1 - A3 B1 - B2 Makes on falling level


Type AP and AM




Supply - Port A or B Outlet - Port C

Dimensional Drawings

Mobrey 'A' and 'G' Flanges

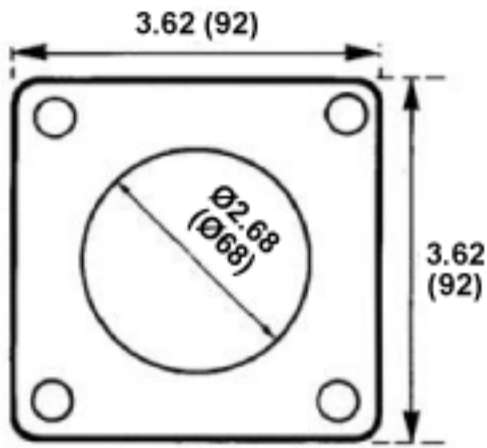

MOBREY 'A' FLANGE:
4 off 14 mm Ø holes
equi-spaced on 92 mm PCD

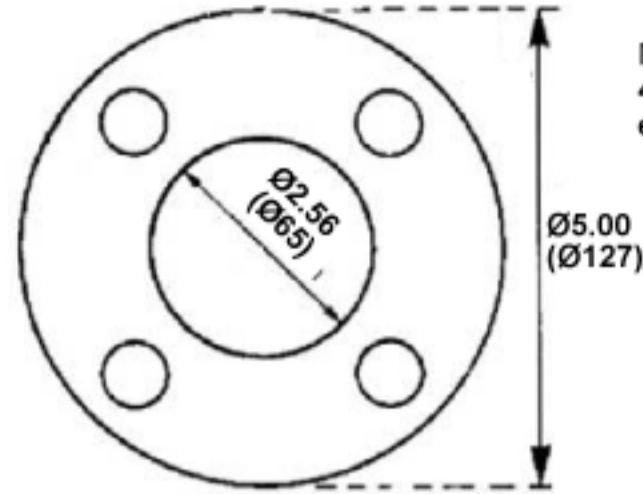


MOBREY 'G' FLANGE:
4 off 14 mm Ø holes
equi-spaced on 98 mm PCD

General Purpose Magnetic Float Switches (Aluminum Bronze Wetside)


Note: See Table 10 on page 18 for dimensions X, Y, and Z

Note: Dimensions are in inches (mm)

SWITCH MECHANISM TYPES DB AND PB

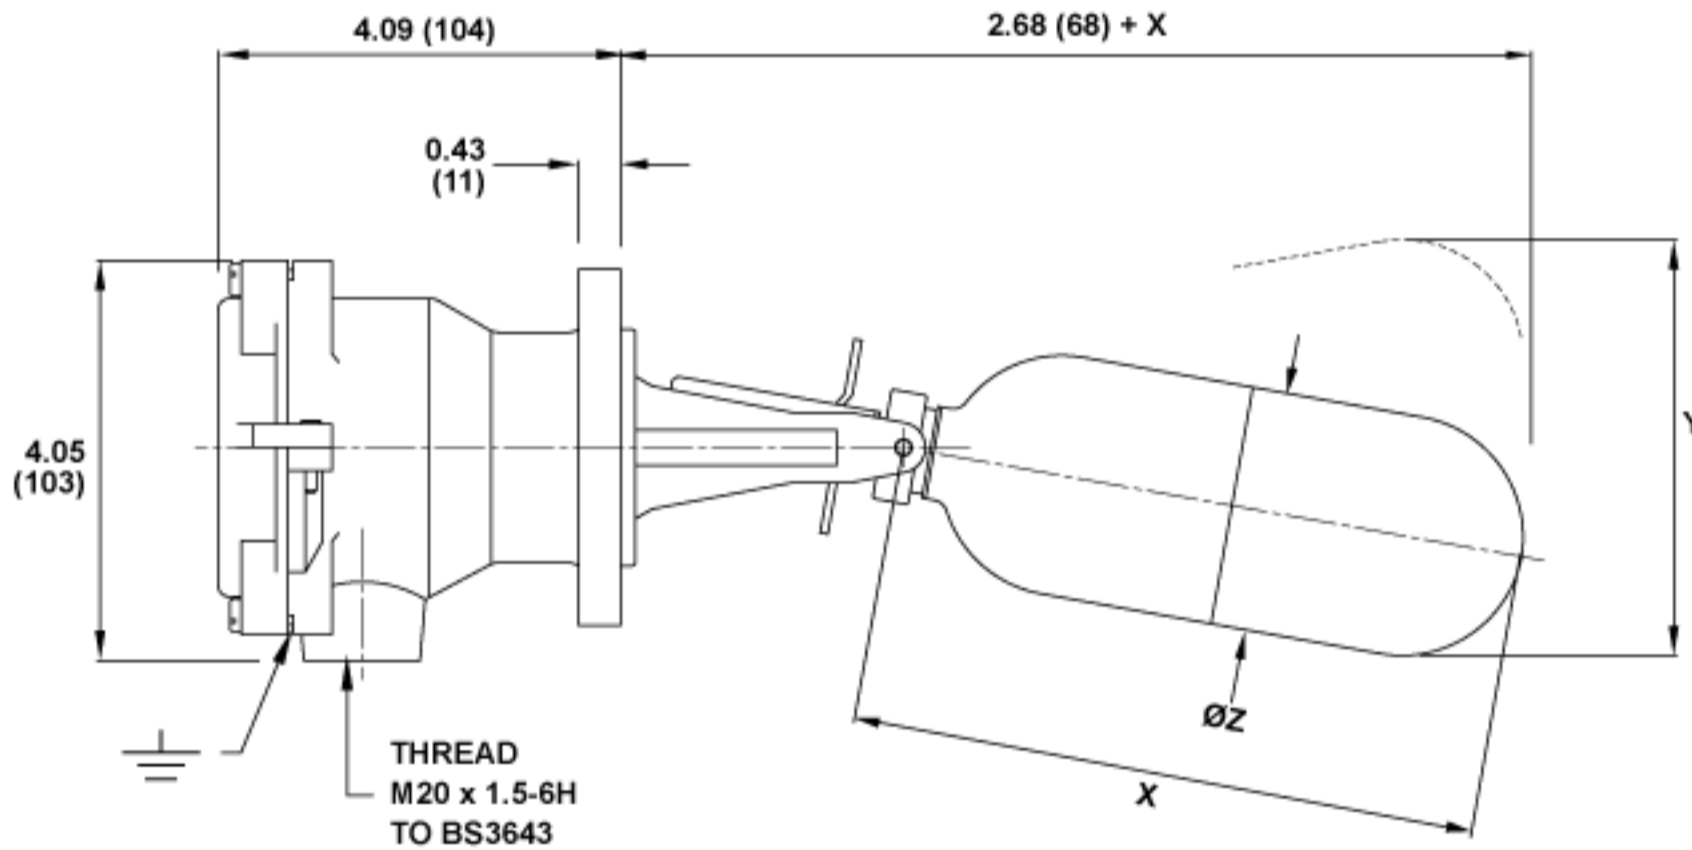

SWITCH MECHANISM TYPES D6B AND P6B

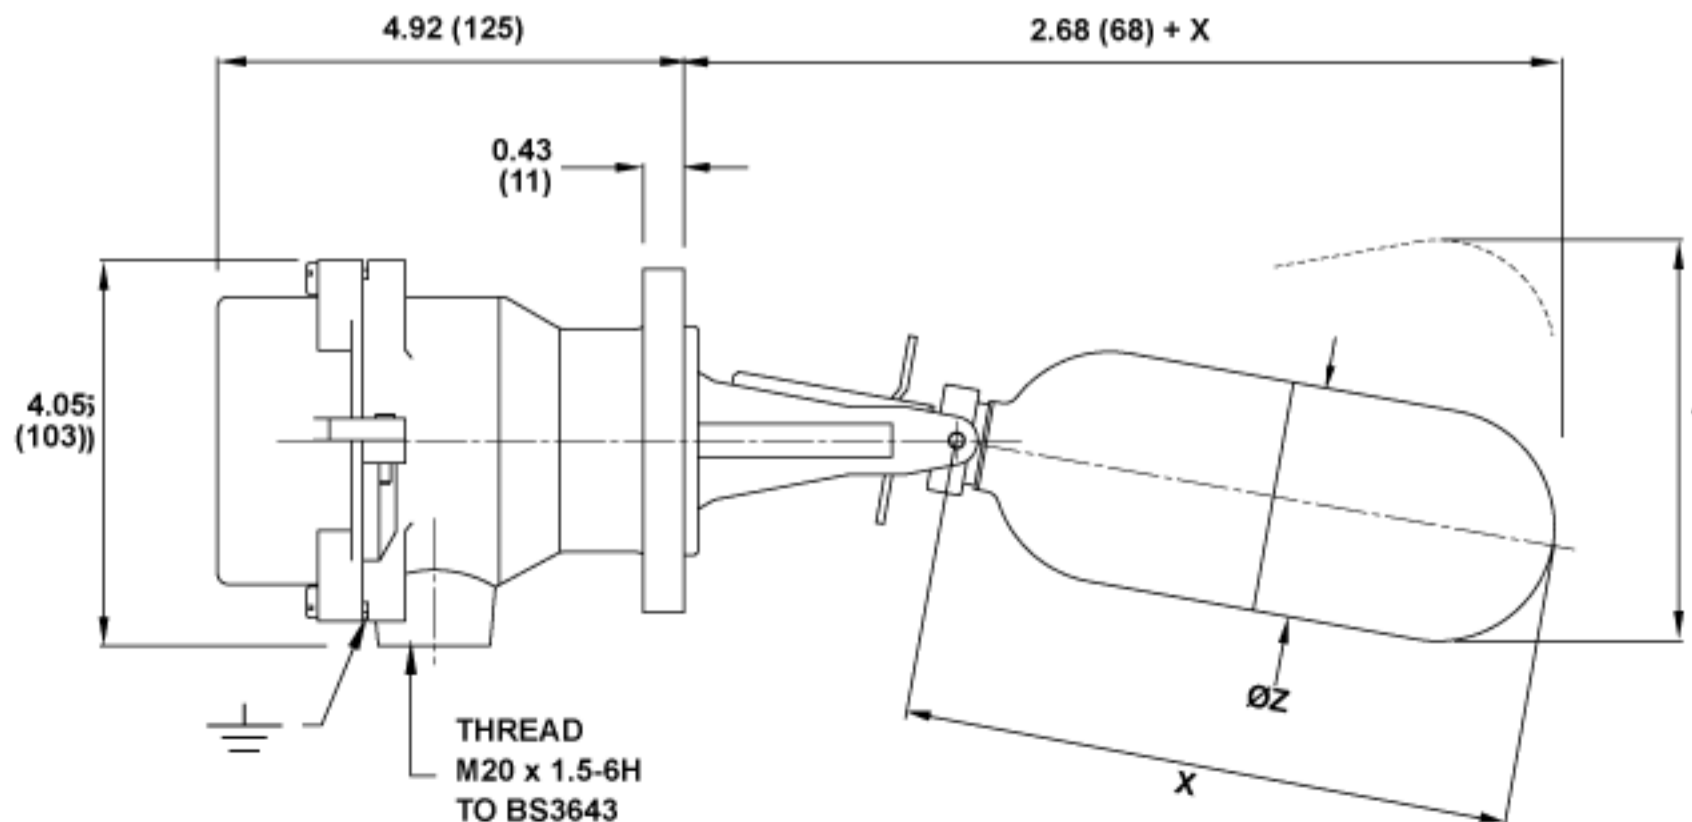


Horizontal Float Switches

General Purpose Magnetic Float Switches (Stainless Steel Wetside)

Note: See Table 10 for dimensions X, Y, and Z

Note: Dimensions are in inches (mm)

MOBREY FLANGE

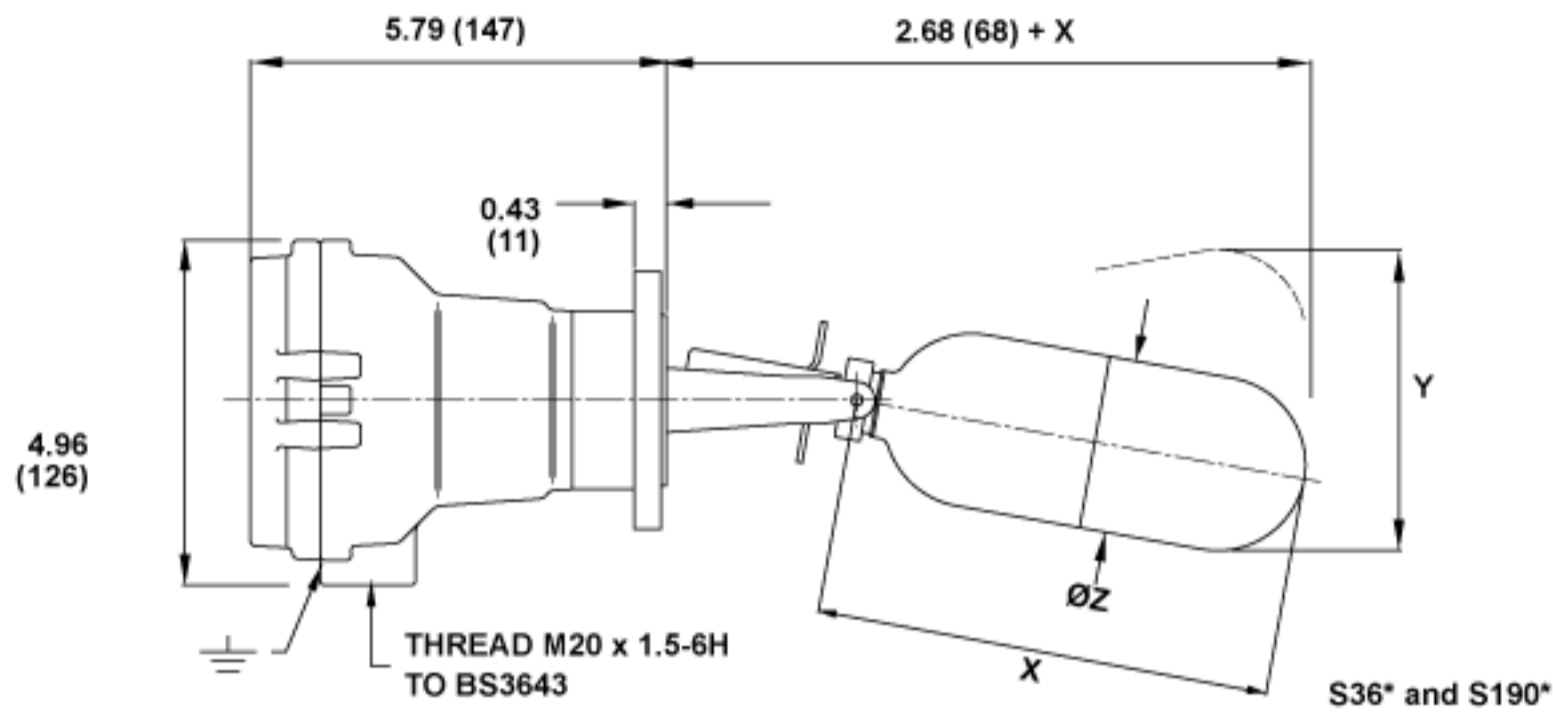

ASME B16.5 / EN1092-1 FLANGE

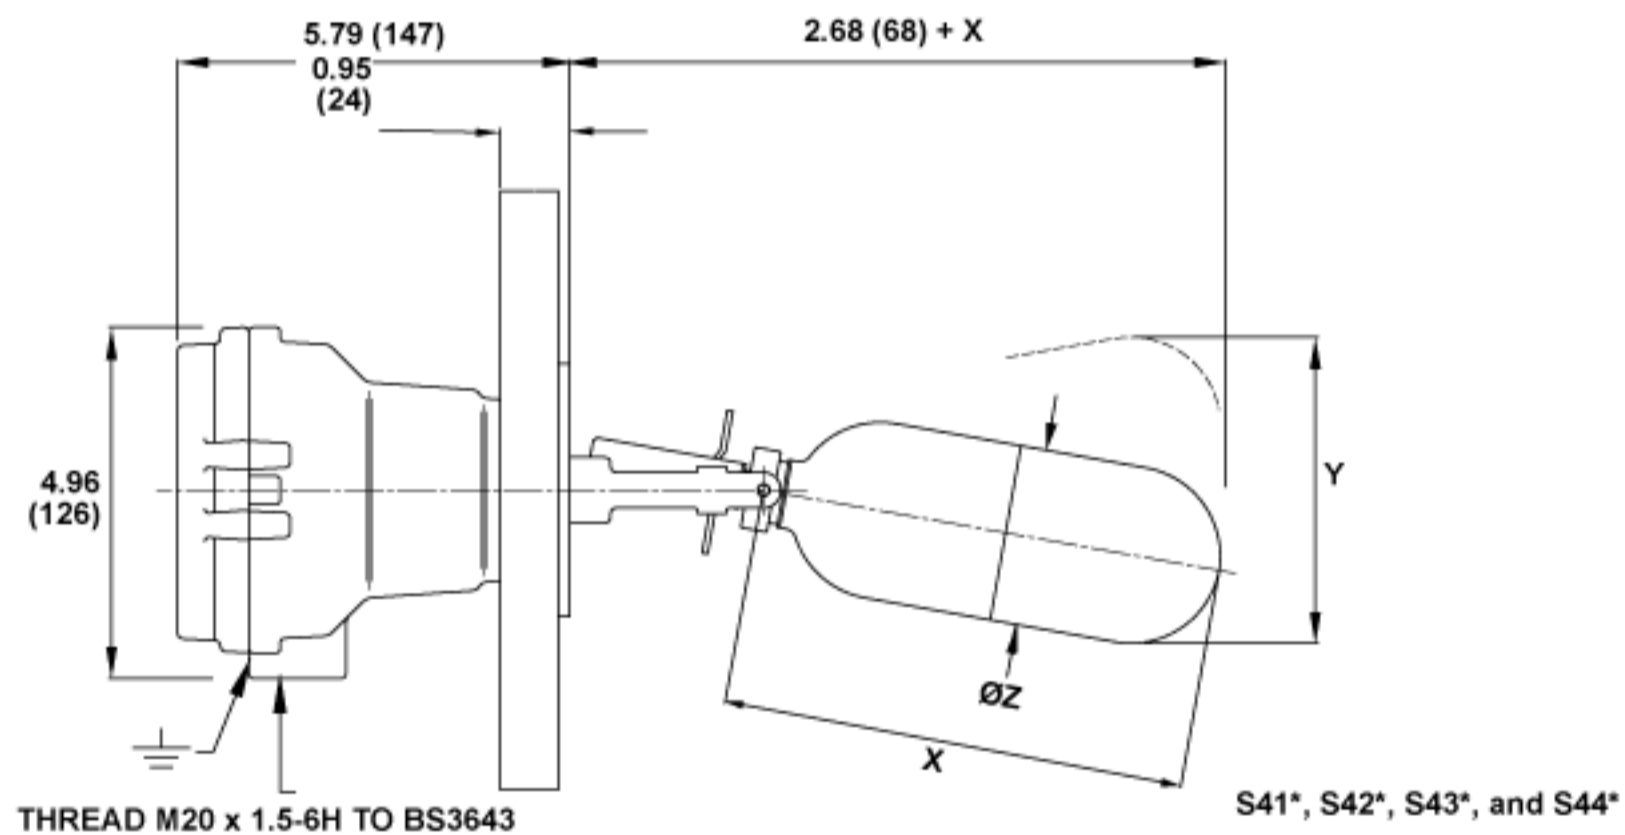


TABLE 10. Float Dimensions X, Y, and Z – General Purpose Switches

Float Type	Minimum S.G.	Max. P@T _{Room} PSI (Bar)	Max. T _{Process} °F (°C)	Differential in. (mm)	Dimension X in. (mm)	Dimension Y in. (mm)	Dimension ØZ in. (mm)	Float Material
F84	0.65	500 (34.5)	752 (400)	0.51 (13)	6.45 (164)	4.68 (119)	2.56 (65)	316 SST
F96	0.60	1073 (74)	752 (400)	0.51 (13)	6.45 (164)	4.68 (119)	2.56 (65)	316 SST
F98	0.45	500 (34.5)	752 (400)	0.55 (14)	7.24 (184)	5.00 (127)	2.56 (65)	316 SST
F106	0.51	1073 (74)	752 (400)	0.51 (13)	7.28 (185)	4.25 (108)	2.56 (65)	316 SST
F107	0.71	2900 (200)	752 (400)	0.51 (13)	6.77 (172)	4.72 (120)	2.56 (65)	316 SST
F68/+(¹)	0.72 to 0.85	500 (34.5)	752 (400)	Variable (See page 21)			2.56 (65)	316 SST
F21/+(¹)	0.70	435 (30)	752 (400)	Variable (See page 22)			5.08 (129)	316 SST
F104/+(¹)	Various	500 (34.5)	752 (400)	As Ordered (See page 23)			2.56 (65)	316 SST
F93	0.75	Atmospheric	356 (180)	0.51 (13)	7.20 (183)	124	2.56 (65)	316 SST
F185	0.67	500 (34.5)	410 (210)	0.51 (13)	6.45 (164)	4.68 (119)	2.56 (65)	Alloy 400

(1) Refer to pages 21, 22, and 23 for technical float details and length options. See "Nozzle and Stud Lengths" on page 21 for stud lengths.

Hazardous Area Magnetic Float Switches

Note: See Table 11 for dimensions X, Y, and Z

Note: Dimensions are in inches (mm)

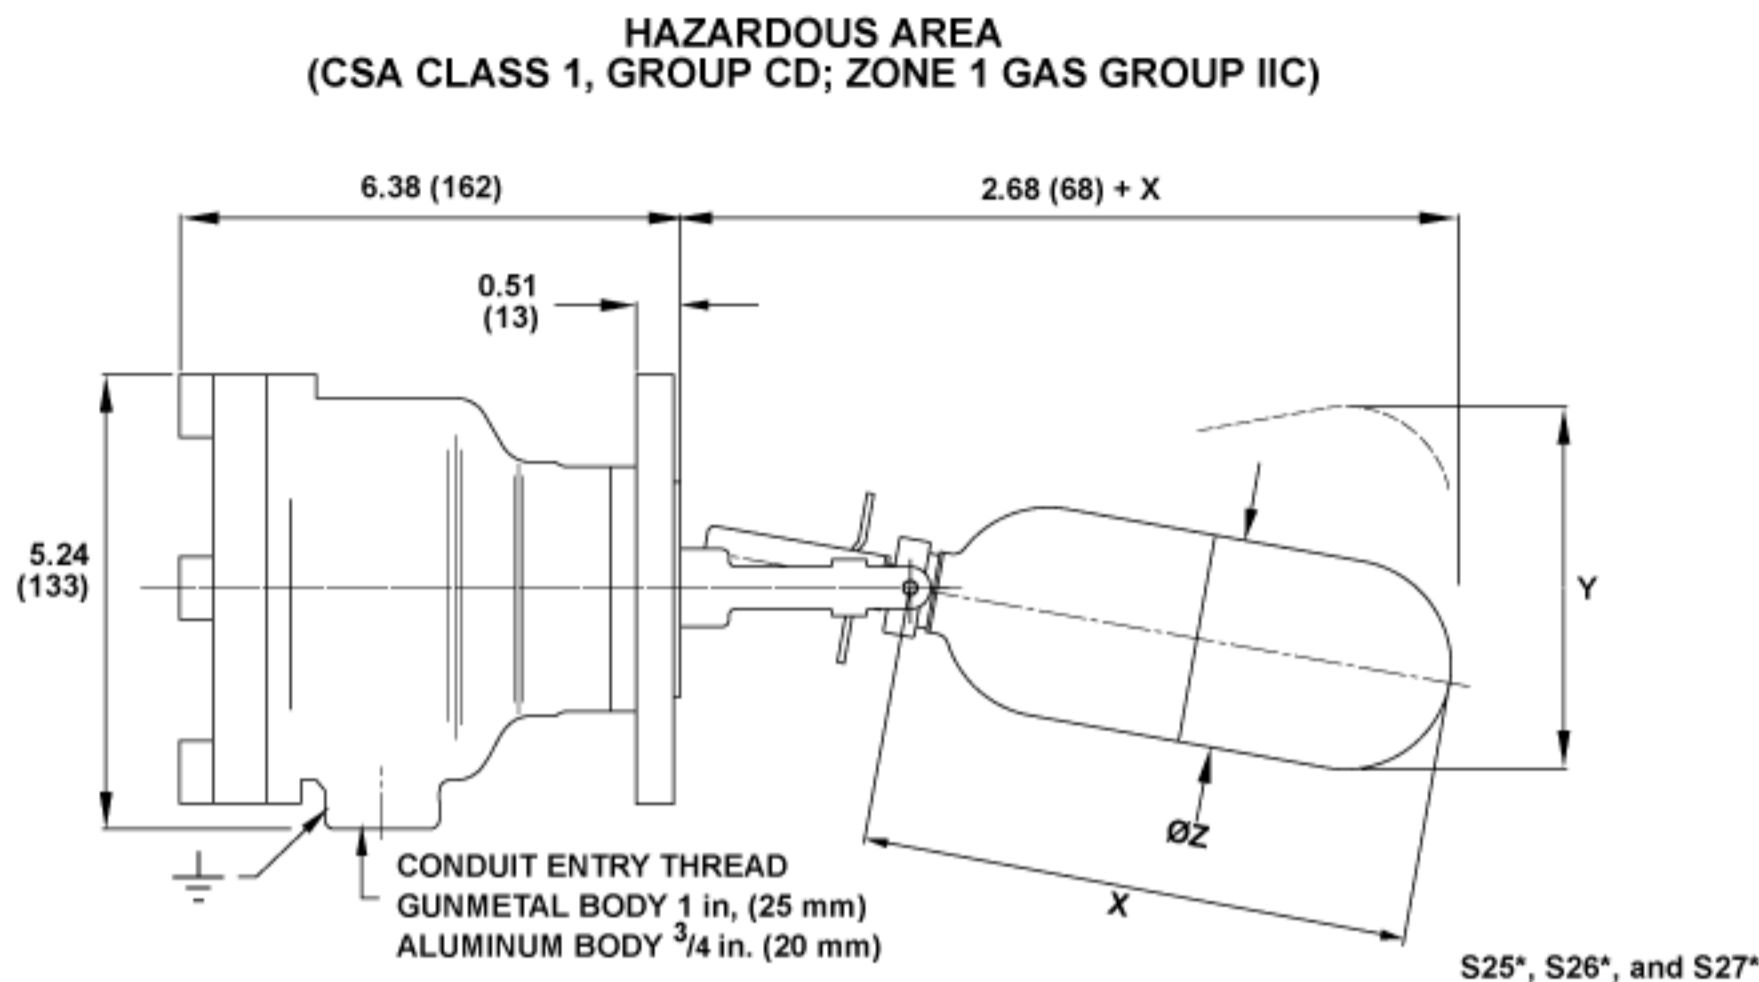


TABLE 11. Float Dimensions X, Y, and Z – Hazardous Area and Marine Switches

Float Type	Minimum S.G.	Max. P@T _{Room} PSI (Bar)	Max. T _{Process} °F (°C)	Differential in. (mm)	Dimension X in. (mm)	Dimension Y in. (mm)	Dimension ØZ in.(mm)	Float Material
F84	0.65	500 (34.5)	752 (400)	0.51 (13)	6.45 (164)	4.68 (119)	2.56 (65)	316 SST
F98	0.45	500 (34.5)	752 (400)	0.51 (14)	7.24 (184)	5.00 (127)	2.56 (65)	316 SST
F106	0.51	1073 (74)	752 (400)	0.51 (13)	7.28 (185)	4.25 (108)	2.56 (65)	316 SST
F107	0.71	2900 (200)	752 (400)	0.51 (13)	6.77 (172)	4.72 (120)	2.56 (65)	316 SST
F68/+(¹)	0.72 to 0.85	500 (34.5)	752 (400)	Variable (See page 21)			2.56 (65)	316 SST
F21/+(¹)	0.70	435 (30)	752 (400)	Variable (See page 22)			5.08 (129)	316 SST
F104/+(¹)	Various	500 (34.5)	752 (400)	As Ordered (See page 23)			2.56 (65)	316 SST
F88	0.8/1.0	1073 (74)	752 (400)	1.02 (26)	14.13 (359)	7.79 (198)	2.56 (65)	316 SST
F93	0.75	Atmospheric	356 (180)	0.51 (13)	7.20 (183)	4.88 (124)	2.56 (65)	316 SST
F185	0.67	500 (34.5)	410 (210)	0.51 (13)	6.45 (164)	4.68 (119)	2.56 (65)	Alloy 400
F264	0.85	464 (32.0)	410 (210)	0.9 (23)/1.14 (29)/1.3 (33)	7.05 (179)	Variable	2.5 (63.5)	Alloy 400

(1) Refer to pages 21, 22, and 23 for technical float details and length options. See "Nozzle and Stud Lengths" on page 21 for stud lengths.


Horizontal Float Switches

Marine Magnetic Float Switches


Note: Dimensions are in inches (mm)

Note: See Table 11 on page 19 for dimensions X, Y, and Z


ALUMINUM BRONZE WETSIDE

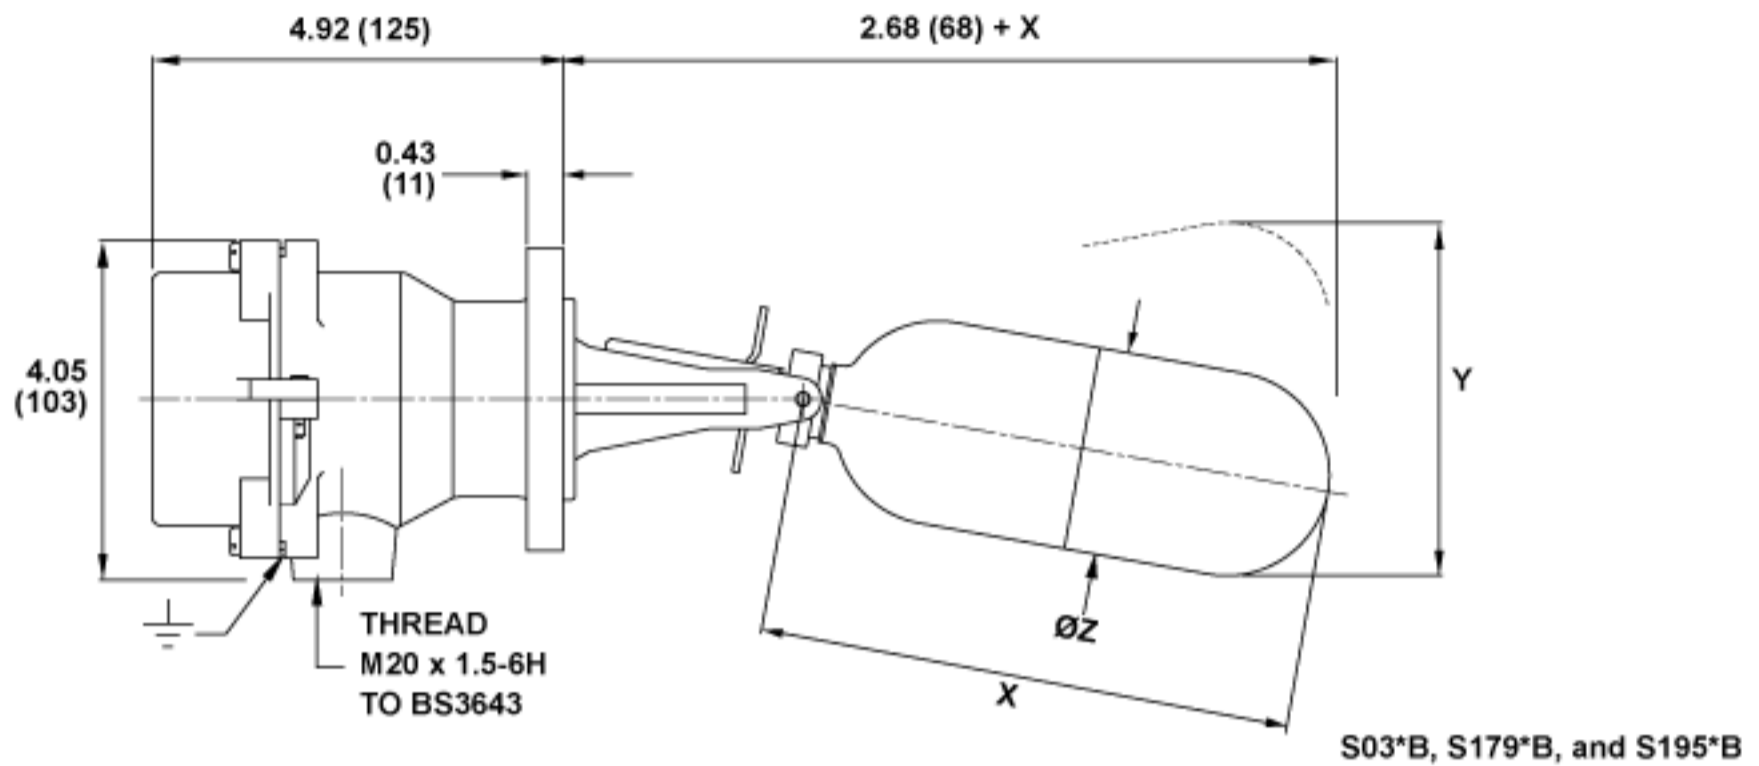


STAINLESS STEEL WETSIDE

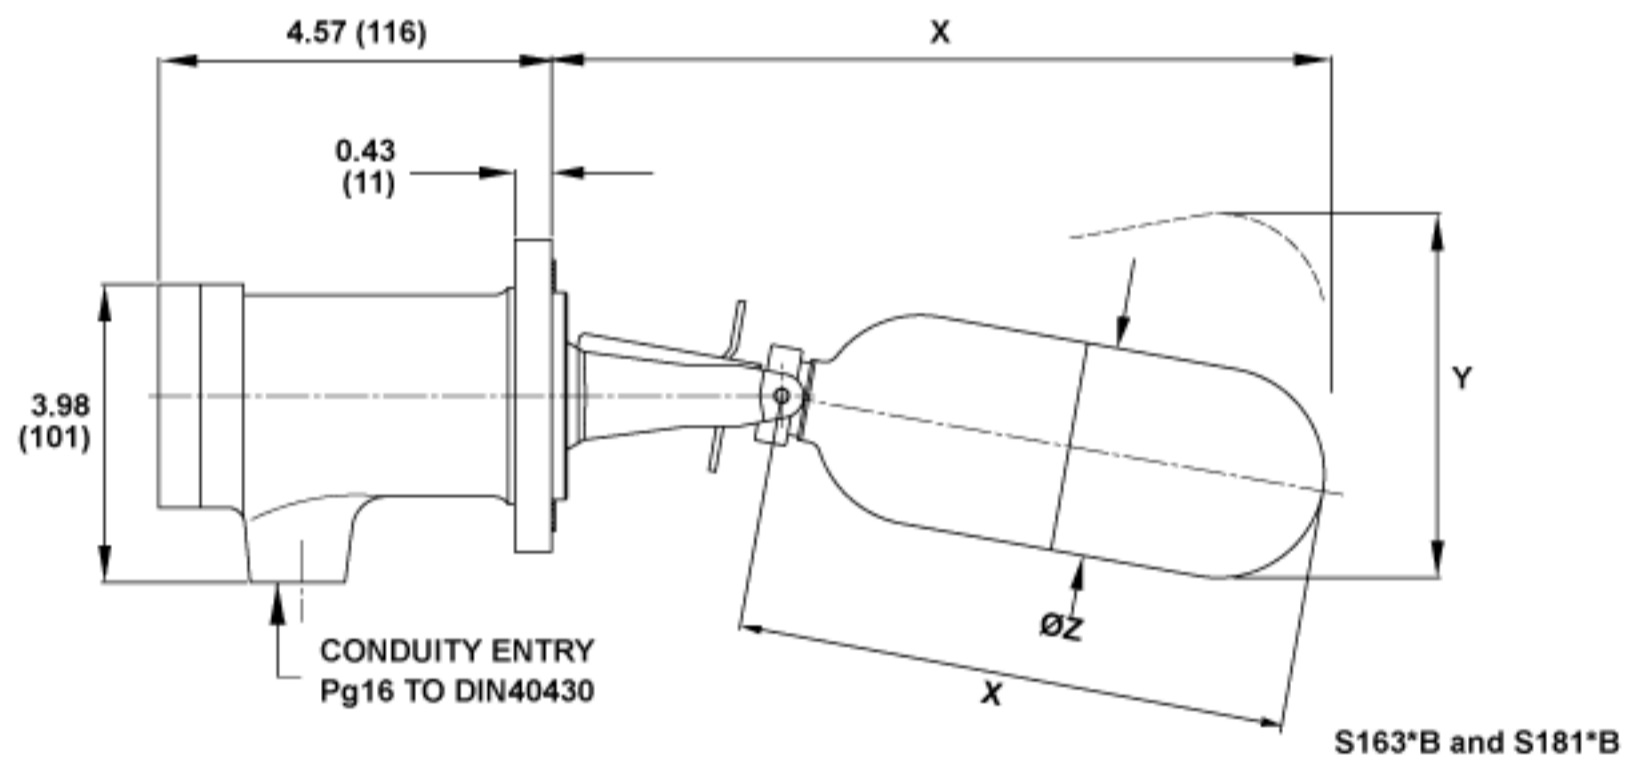

HAZARDOUS SUBMERSIBLE / HOSEPROOF

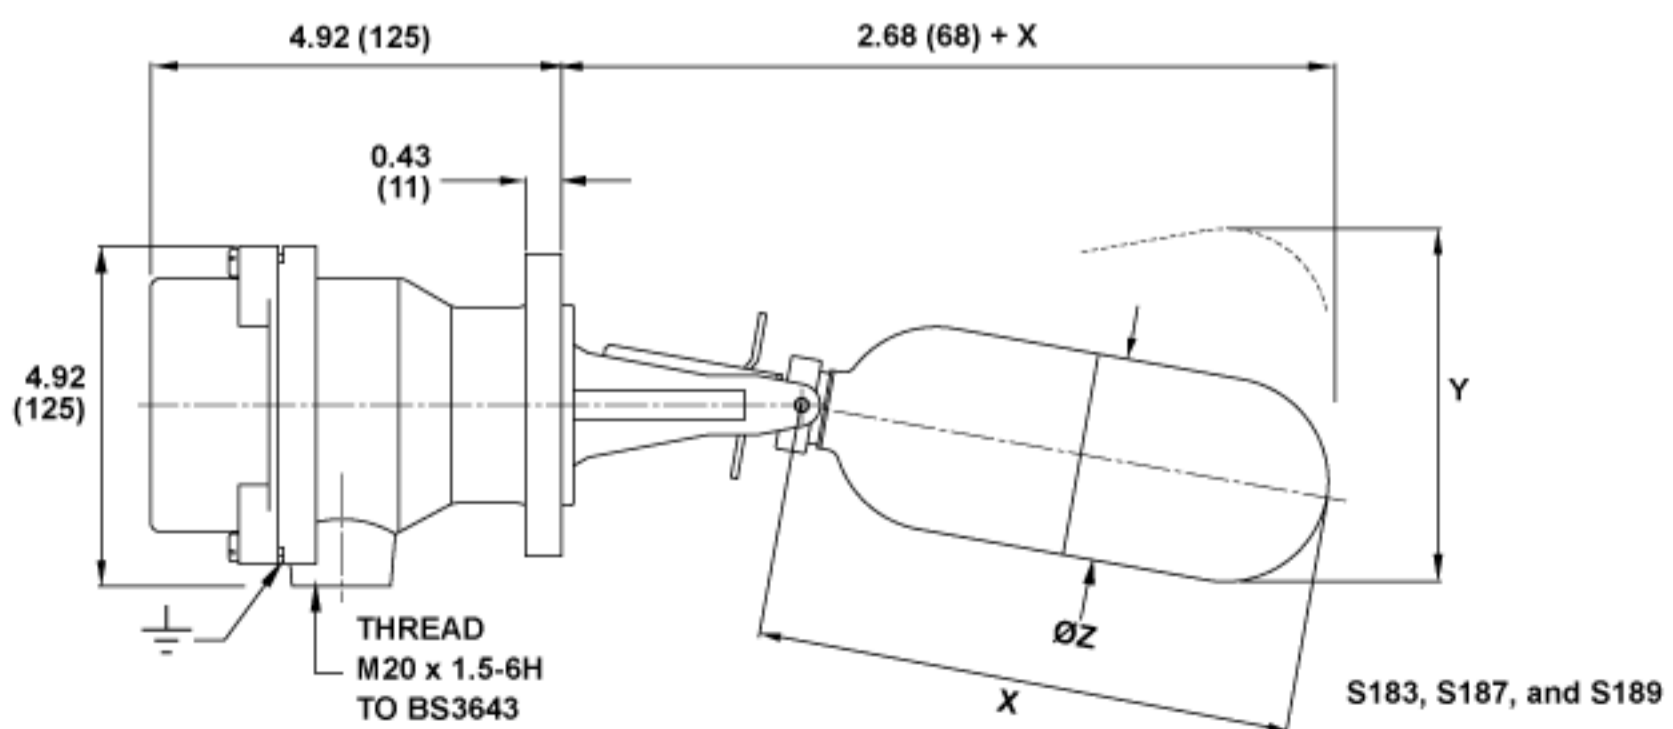

Nozzle and Stud Lengths

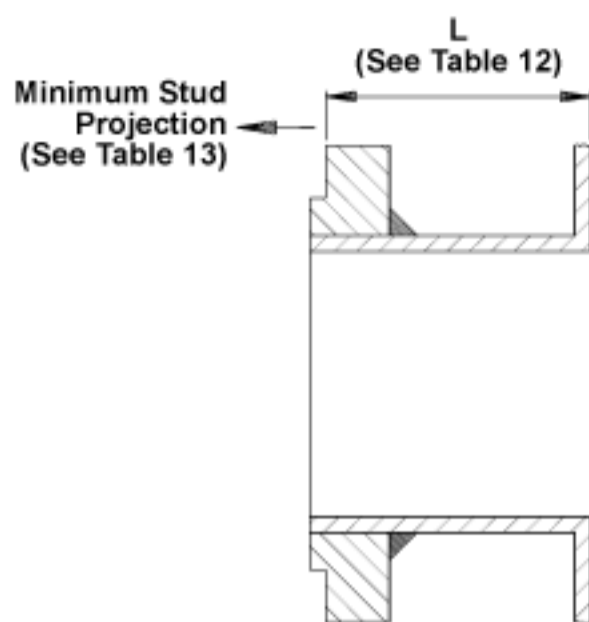

Note:
See Table 6
on page 10
for
companion
flanges and

TABLE 12. Max. Length in mm (Dimension L)


	F68/*	F84	F185	F88	F93	F96	F98	F107	F106	F264
Mobrey A	65	75	75	135	75	75	90	-	92	75
DN65	65	75	75	135	-	75	90	-	92	75
DN80	70	80	80	170	-	75	90	-	98	90
DN100	95	105	105	200	-	105	105	-	110	100
DN125	105	140	140	200	-	140	140	-	140	140
DN150	224	180	180	200	-	180	170	-	200	190
3 in. 300/150	70	80	80	170	-	80	90	-	98	90
4 in. 300/150	95	105	105	200	-	105	105	-	110	100
3 in. 600	62	70	70	130	-	70	85	-	89	70
3 in. 900	62	70	70	130	-	70	85	118	89	70
Mobrey A	65	75	75	135	-	75	90	-	92	75
6 in. 150	224	-	-	200	-	-	-	-	-	190

TABLE 13. Minimum Stud Projection (in mm)

Rating	G	A	PN 16					PN 40					PN 63				150		300		600	900
Size	-	-	65	80	100	125	150	65	80	100	125	150	80	100	125	150	3 in.	4 in.	3 in.	4 in.	3 in.	3 in.
Stud	35	30	40	40	40	40	44	42	42	46	52	54	52	55	62	67	46	46	54	56	64	73

Horizontal F68 Pump Control And Alarm Float

Note: Dimensions are in inches (mm)

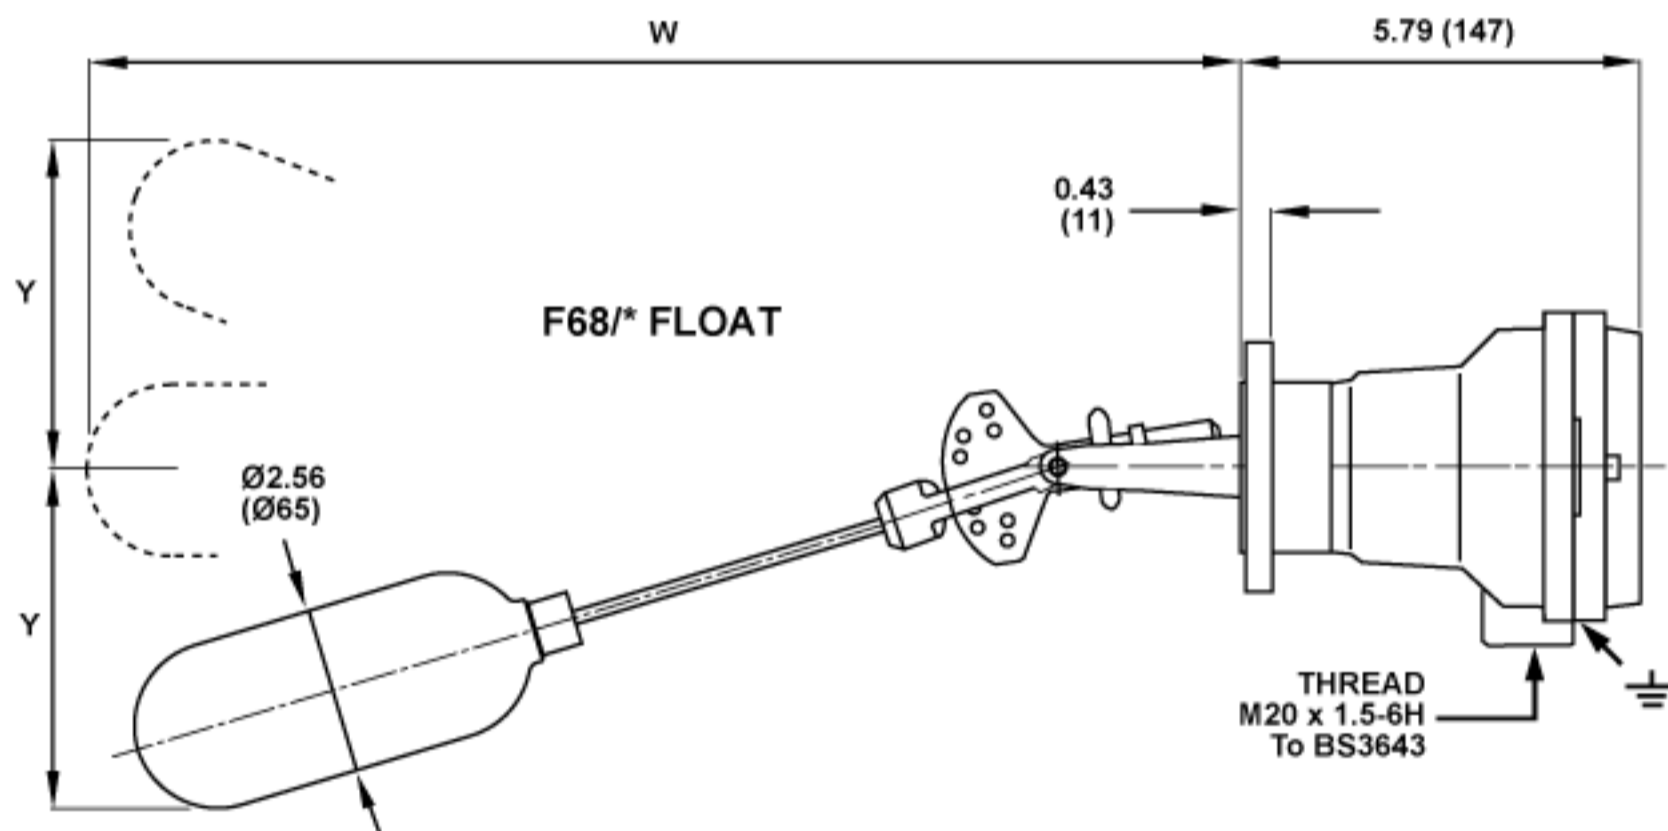

NOTE:

Switches fitted with the F68/+ type float may be adjusted on site to meet pump control differentials. The float is available as F68/1 or F68/4. The F68/4 has pre-drilled holes along the rod to allow the user to achieve the 1/2 and 1/3 differentials in Table 14.

NOTE:

Full details of the operating levels and differentials are in the product manual (Mobrey Document Number M310).

TABLE 14. Dimensions and Specifications for F68/*

Maximum Intrusions ⁽¹⁾	F68/1	F68/2	F68/3	F68/4
Wetside in. (mm) 'W'	14.2 (360)	18.5 (470)	23.2 (590)	25.3 (643)
Minimum Tank Dimension Above/Below Centre Line (mm) 'Y'	8.5 (216)	11.5 (292)	14.5 (368)	16.0 (406)
Minimum Specific Gravity (S.G.)	0.72	0.8	0.82	0.85
Maximum Differential (mm)	9.72 (247)	14.2 (360)	19.0 (483)	21.9 (555)


(1) These dimensions in inches (mm) are approximate for cold water and will vary for liquids with a different specific gravity (SG.)

Horizontal Float Switches

Vertical F21 Pump Control And Alarm Float

Note: See Table 15 for dimensions S and T

F21/* FLOAT

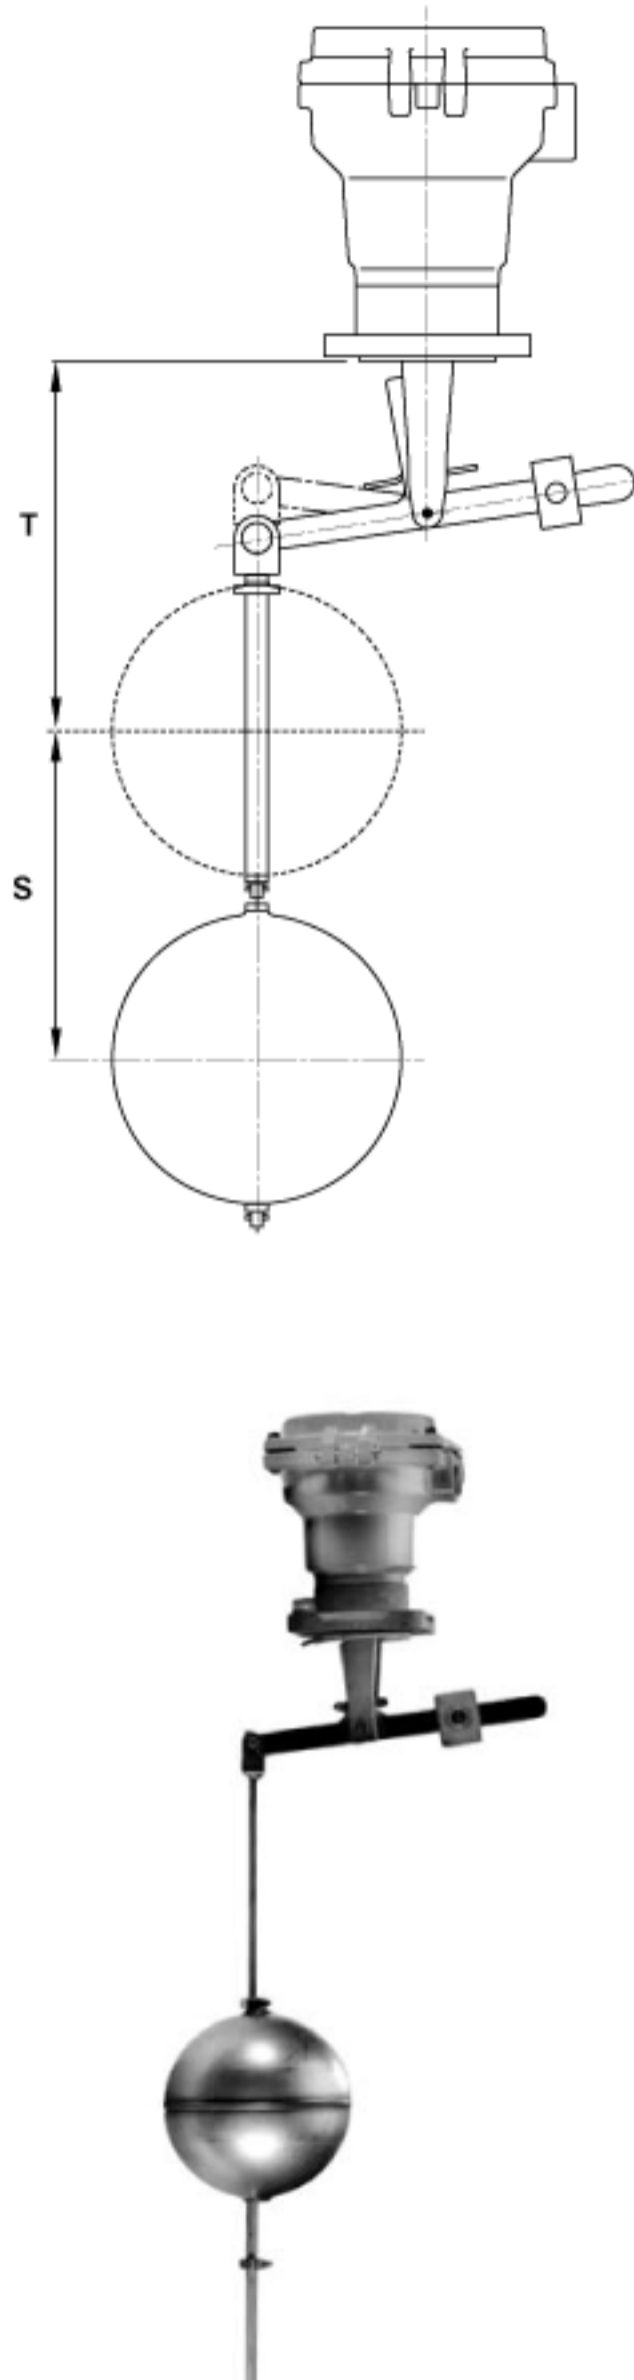

NOTE:

Float assembly must be fitted from inside if for use in a vessel, or complete switch and float assembly may be mounted on a suitable bracket or manhole cover.

Float rod lengths available:

F21/1 5 ft. (1524 mm)

F21/2 10 ft. (3048 mm)

F21/3 15 ft. (4570 mm) maximum


Float rods may be cut to length on site and switches set to operate at required level in either pump control or alarm mode by following the supplied setting instructions.

TABLE 15. Dimensions S and T for F21/+

Pump Differential 'S' in. (mm)	Alarm Level in. (mm)	
	Minimum 'T'	Maximum 'S'
0.5 to 174.0 (13 to 4420) ⁽¹⁾	6.77 (172)	173/2 (4400) ⁽¹⁾

(1) When the maximum rod length is specified.


Figure 4. Pump Control And Alarm Applications

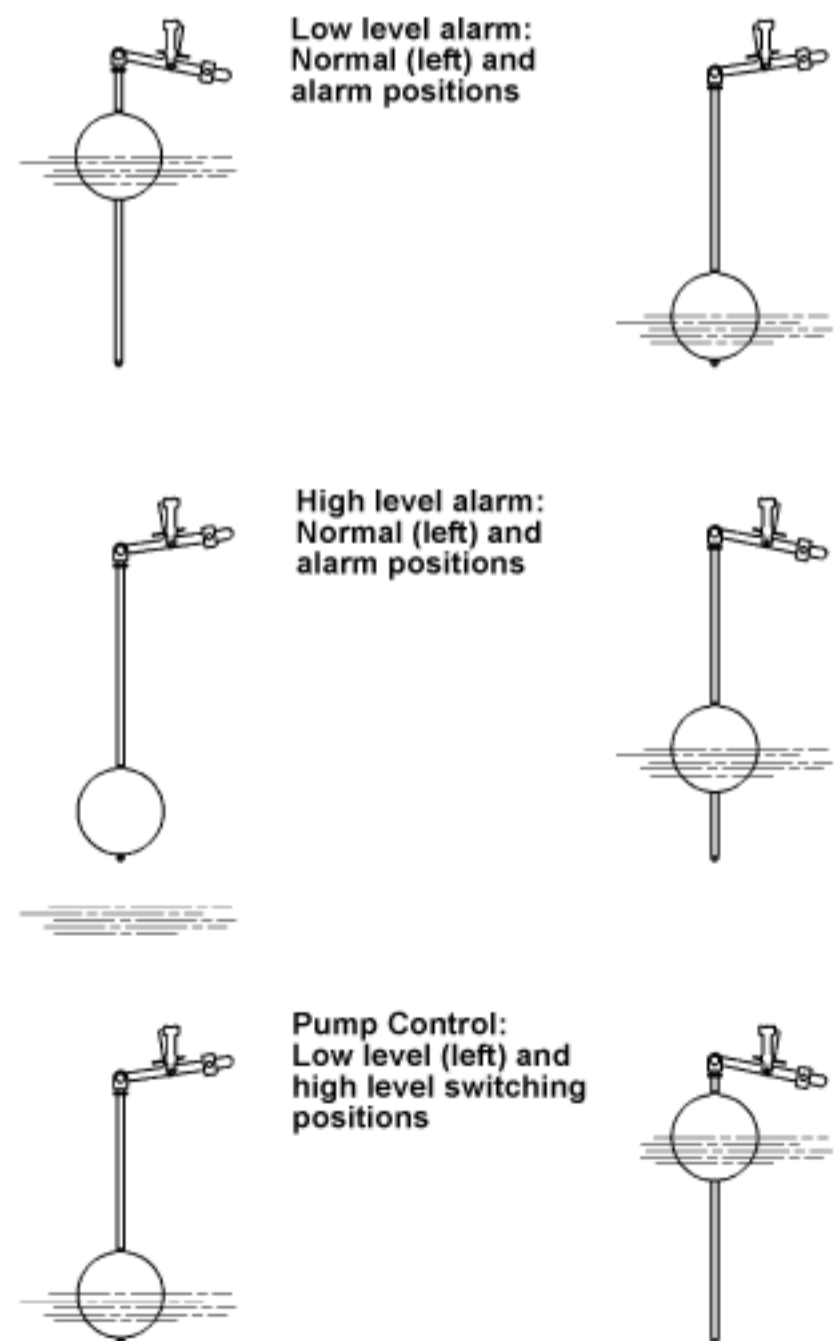

Cranked Arm Floats F104


Note: See Table 16 or Table 17 for dimensions in mm

HORIZONTALLY MOUNTED F104/* FLOAT

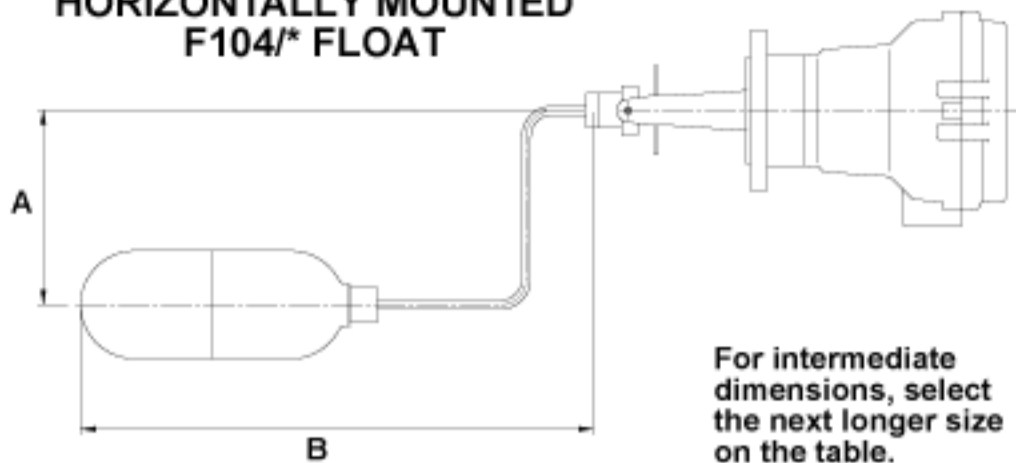

To order, specify the F104 float with these details:

1. A and B or V and W dimensions.
2. Liquid in contact.
3. Specific Gravity (S.G.) of liquid.
4. Magnetic switch head type number (e.g. S01DB/F)
5. State land or marine application.

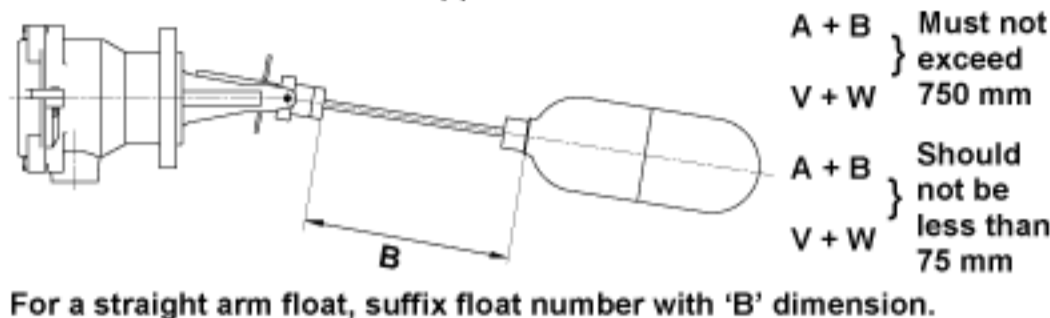

For a straight arm float, suffix float number with 'B' dimension.

TABLE 16. Dimensions A+B with Minimum S.G. for Horizontal Mounted Switches (Land Applications)

A	B																									
	75	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650	675	
0&75	.64	.64	.65	.66	.67	.67	.68	.69	.70	.71	.72	.73	.73	.74	.75	.76	.77	.78	.79	.80	.81	.81	.82	.83	.84	
100	.64	.65	.66	.67	.68	.69	.70	.70	.71	.72	.73	.74	.75	.76	.77	.78	.79	.79	.80	.81	.82	.83	.84	.85		
125	.65	.66	.67	.68	.69	.70	.71	.72	.73	.74	.75	.75	.76	.77	.78	.79	.80	.81	.82	.83	.84	.85	.86			
150	.65	.67	.68	.69	.70	.71	.72	.73	.74	.75	.76	.77	.78	.79	.80	.81	.82	.83	.84	.85	.85	.86				
175	.66	.67	.69	.70	.71	.72	.73	.74	.75	.76	.77	.78	.79	.80	.81	.82	.83	.84	.85	.86	.87					
200	.66	.68	.70	.71	.72	.73	.75	.76	.77	.78	.79	.80	.81	.82	.83	.84	.85	.86	.87	.88						
225	.67	.69	.70	.72	.73	.75	.76	.77	.78	.79	.80	.81	.82	.84	.85	.86	.87	.88	.89							
250	.67	.69	.71	.73	.74	.76	.77	.78	.80	.81	.82	.83	.84	.85	.86	.87	.88	.89								
275	.68	.70	.72	.74	.76	.77	.78	.80	.81	.82	.83	.85	.86	.87	.88	.89	.90									
300	.68	.71	.73	.75	.77	.78	.80	.81	.82	.84	.85	.86	.87	.88	.89	.90										
325	.69	.71	.74	.76	.78	.80	.81	.83	.84	.85	.86	.88	.89	.90	.91											
350	.69	.72	.75	.77	.79	.81	.82	.84	.85	.87	.88	.89	.90	.92												
375	.70	.72	.76	.78	.80	.82	.84	.85	.87	.88	.90	.91	.92													
400	.71	.73	.76	.79	.81	.83	.85	.87	.88	.90	.91	.92														
425	.71	.74	.77	.80	.83	.85	.87	.88	.90	.91	.93															
450	.72	.74	.78	.81	.84	.86	.88	.90	.91	.93																
475	.72	.75	.79	.82	.85	.87	.89	.91	.93																	
500	.73	.76	.80	.83	.86	.89	.91	.93																		
525	.74	.77	.81	.85	.88	.90	.92																			
550	.74	.77	.81	.86	.89	.92																				
575	.75	.78	.82	.87	.90																					
600	.76	.79	.83	.88																						
625	.76	.80	.84																							
650	.77	.80																								
675	.78																									

TABLE 17. Dimensions A+B with Minimum S.G. for Horizontal Mounted Switches (Marine Applications)

A	B																									
	75	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650	675	
0&75	.67	.67	.68	.68	.69	.69	.70	.71	.72	.73	.73	.74	.75	.76	.77	.78	.79	.79	.80	.81	.82	.83	.84	.85	.86	
100	.68	.68	.69	.70	.70	.71	.72	.73	.74	.74	.75	.76	.77	.78	.79	.80	.81	.81	.82	.83	.84	.85	.86	.87		
125	.69	.70	.71	.71	.72	.73	.74	.75	.76	.76	.77	.78	.79	.80	.81	.82	.83	.84	.84	.85	.86	.87	.88			
150	.71	.71	.72	.73	.74	.75	.76	.77	.78	.78	.79	.80	.81	.82	.83	.84	.85	.86	.87	.88	.89	.89				
175		.73	.74	.75	.76	.77	.78	.79	.80	.81	.82	.83	.83	.84	.85	.86	.87	.88	.89	.90	.91					
200			.76	.77	.78	.79	.80	.81	.82	.83	.84	.85	.86	.87	.88	.89	.90	.90	.91	.92						
225			.79	.80	.81	.82	.83	.84	.85	.86	.86	.87	.88	.89	.90	.91	.92	.93	.94							
250				.83	.84	.85	.86	.87	.87	.88	.89	.90	.91	.92	.93	.94	.95	.95								
275					.88	.88	.89	.90	.91	.91	.92	.93	.94	.95	.96	.96	.97									
300					.93	.93	.93	.93	.94	.95	.95	.96	.97	.98	.99	.99										
325						.98	.98	.98	.98	.98	.99	1.0	1.0	1.01	1.02											
350							1.04	1.03	1.02	1.03	1.03	1.03	1.04	1.04												
375								1.09	1.08	1.07	1.07	1.07	1.08													
400									1.15	1.13	1.12	1.12														
425										1.20	1.18															

Horizontal Float Switches

Note: See Table 18 or Table 19 for dimensions in mm

VERTICALLY MOUNTED F104 FLOAT

For intermediate dimensions, select the next longer size on the table.

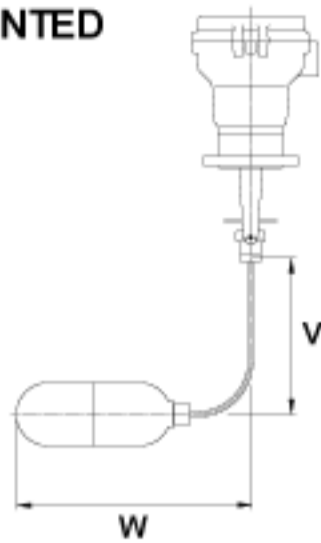


TABLE 18. Dimensions V+W with Minimum S.G. for Vertically Mounted Switches (Land Applications)

V	W																								
	75	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650	675
75	.67	.67	.66	.66	.66	.66	.67	.67	.68	.68	.68	.70	.70	.71	.72	.73	.73	.74	.75	.76	.77	.77	.78	.79	.80
100	.67	.66	.66	.66	.66	.66	.67	.67	.68	.68	.69	.70	.70	.71	.72	.73	.73	.74	.75	.76	.77	.77	.78	.79	
125	.67	.66	.66	.66	.66	.66	.67	.67	.68	.68	.69	.70	.70	.71	.72	.73	.74	.74	.75	.76	.77	.78	.78		
150	.67	.66	.66	.66	.66	.66	.67	.67	.68	.68	.69	.70	.71	.71	.72	.73	.74	.74	.75	.76	.77	.78			
175	.67	.66	.66	.66	.66	.66	.67	.67	.68	.69	.69	.70	.71	.71	.72	.73	.74	.75	.75	.76	.77				
200	.67	.66	.66	.66	.66	.67	.67	.68	.68	.69	.69	.70	.71	.72	.72	.73	.74	.75	.75	.76					
225	.66	.66	.66	.66	.66	.67	.67	.68	.68	.69	.70	.70	.71	.72	.72	.73	.74	.75	.76						
250	.66	.66	.66	.66	.67	.67	.67	.68	.68	.69	.70	.70	.71	.72	.73	.73	.74	.75							
275	.67	.66	.66	.67	.67	.67	.68	.68	.69	.69	.70	.71	.71	.72	.73	.73	.74								
300	.67	.67	.66	.67	.67	.67	.68	.68	.69	.69	.70	.71	.71	.72	.73	.74									
325	.67	.67	.67	.67	.67	.67	.68	.68	.69	.70	.70	.71	.72	.72	.73										
350	.67	.67	.67	.67	.67	.68	.68	.69	.69	.70	.70	.71	.72	.72											
375	.68	.67	.67	.67	.67	.68	.68	.69	.69	.70	.71	.71	.72												
400	.68	.67	.67	.67	.68	.68	.68	.69	.70	.70	.71	.71													
425	.68	.68	.68	.68	.68	.68	.69	.69	.70	.70	.71														
450	.68	.68	.68	.68	.68	.68	.69	.69	.70	.71															
475	.69	.68	.68	.68	.68	.69	.69	.70	.70																
500	.69	.69	.68	.68	.69	.69	.69	.70																	
525	.69	.69	.69	.69	.69	.69	.70																		
550	.70	.69	.69	.69	.69	.70																			
575	.70	.70	.69	.69	.70																				
600	.70	.70	.70	.70																					
625	.71	.70	.70																						
650	.71	.71																							
675	.72																								

TABLE 19. Dimensions V+W with Minimum S.G. for Vertically Mounted Switches (Marine Applications)

V	W																								
	75	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650	675
75	.75	.72	.70	.69	.68	.68	.68	.68	.68	.69	.70	.71	.71	.72	.73	.74	.74	.75	.76	.77	.78	.79	.79	.80	.81
100	.76	.72	.70	.68	.67	.68	.68	.68	.69	.70	.70	.71	.72	.73	.73	.74	.75	.76	.77	.77	.78	.79	.80	.81	
125	.77	.72	.69	.67	.67	.68	.68	.69	.69	.70	.71	.72	.72	.73	.74	.75	.75	.76	.77	.78	.79	.80	.80		
150	.79	.72	.68	.67	.67	.68	.69	.69	.70	.71	.71	.72	.73	.74	.74	.75	.76	.77	.78	.78	.79	.80			
175		.71	.67	.67	.68	.68	.69	.70	.70	.71	.72	.73	.73	.74	.75	.76	.76	.77	.78	.79	.80				
200			.67	.68	.68	.69	.70	.70	.71	.72	.72	.73	.74	.75	.75	.76	.77	.78	.79	.79					
225				.68	.69	.70	.70	.71	.72	.72	.73	.74	.74	.75	.76	.77	.78	.78	.78						
250				.69	.70	.70	.71	.71	.72	.73	.74	.74	.75	.76	.77	.77	.78	.78							
275					.70	.71	.71	.72	.73	.73	.74	.75	.76	.76	.77	.78	.79								
300						.71	.73	.73	.73	.74	.75	.76	.76	.77	.78	.79									
325							.73	.73	.74	.75	.75	.76	.77	.78	.78										
350								.74	.75	.75	.76	.77	.78	.78											
375									.75	.76	.77	.77	.78												
400										.77	.77	.78													
425											.78														

Horizontal Float Switches

Rosemount Level Solutions

Emerson provides a complete range of Rosemount products for level measurement applications.

Vibrating Fork Switches – Point Level Detection

For high and low alarms, overflow protection, pump control, including wide pressure and temperature requirements, and hygienic applications. Flexible mounting. Immune to changing process conditions and suitable for most liquids.

The product line consists of:

- Rosemount 2160 Wireless
- Rosemount 2130 Extreme Temperature
- Rosemount 2120 Full-featured
- Rosemount 2110 Compact

Differential Pressure – Level or Interface Measurement

Flexible mounting for liquid tank levels, including those with wide temperature and pressure requirements. Can be isolated by valves. Unaffected by: vapor space changes, surface conditions, foam, corrosive fluids, internal tank equipment. Optimize performance with direct mount, Tuned-System Assemblies:

- Rosemount DP Level Transmitters and Remote Seals
- Rosemount 3051S_L, 3051L, and 2051L Liquid Level Transmitters

Ultrasonic – Level Measurement

Top mounted, non-contacting for simple tank and open air level measurements. Unaffected by fluid properties such as: density, viscosity, dirty coating and corrosiveness. Appropriate for routine applications outside of explosion proof areas.

The product line consists of:

- Rosemount 3100 Series Ultrasonic Process Level Transmitters

Guided Wave Radar – Level and Interface Measurement

Top mounted, direct level and interface measurement of liquids or solids, including those with wide temperature and pressure requirements. Unaffected by changing process conditions. Good fit for small spaces and easy swap for older technologies.

The product line consists of:

- Rosemount 5300 Series – Accurate, superior performance transmitter in most applications including process vessels and control
- Rosemount 3300 Series – Versatile and easy-to-use transmitter in most liquid storage and monitoring applications

Non-contacting Radar – Level Measurement

Top mounted, direct level measurement for liquids or solids, including those with wide temperature and pressure requirements. Can be isolated by valves. Unaffected by changing process conditions. Good for dirty, coating and corrosive applications.

The product line consists of:

- Rosemount 5400 Series – Accurate, superior performance 2-wire transmitters for most liquid level applications and process conditions
- Rosemount 5600 Series – 4-wire transmitters with maximum sensitivity and performance for solids, challenging reactors, rapid level changes and excessive process conditions

Chambers for Process Level Instrumentation

- Rosemount 9901 – High quality chambers for external mounting of level measurement and control instrumentation on process vessels

The Emerson logo is a trade mark and service mark of Emerson Electric Co.

Mobrey is a registered trademark of Mobrey Ltd.

All other marks are the property of their respective owners.

We reserve the right to modify or improve the designs or specifications of product and services at any time without notice.

©2010 Mobrey Ltd. All rights reserved.

International:

Emerson Process Management

Mobrey Measurement Division

158 Edinburgh Avenue, Slough,

Berks UK SL1 4UE

T +44 (0)1753 756600

F +44 (0)1753 823589

www.mobrey.com

Ward Industries Limited

Providence House, Brooks Road

Raunds, Northamptonshire

NN9 6NS, England

Tel: +44 (0) 1933 624963

Fax: +44 (0) 1933 625458

Email: sales@wardindustries.co.uk

www.wardindustries.co.uk



EMERSON
Process Management